

Gasification Characteristics of Sewage Sludge in Water under Subcritical Conditions

by Apip Amrullah

Submission date: 02-Jun-2022 08:09PM (UTC-0400)

Submission ID: 1849388222

File name: ACBS2018b-Apip.pdf (122.46K)

Word count: 1484

Character count: 8029

Gasification Characteristics of Sewage Sludge in Water under Subcritical Conditions

Apip AMRULLAH^a, Yukihiro MATSUMURA^{a*}

¹⁷
^a Department of Mechanical Science and Engineering, Hiroshima University, Japan

⁶
Abstract: Gasification of sewage sludge in subcritical water was investigated in a continuous flow reactor at temperatures of 300 and 350 °C and residence time in the range of 5–30 s under the fixed pressure of 25 MPa. The effects of temperature and residence time on the composition of the products were investigated. The gaseous products were analyzed by using a gas chromatograph (GC) equipped with a thermal conductivity detector (TCD) and a flame ionization detector (FID). H₂ was detected by GC-TCD with N₂ as the carrier gas; CO₂ and CO were detected by GC-TCD with He as the carrier gas, and CH₄, C₂H₄, and C₂H₆ were detected by GC-FID with He as the carrier gas. The results showed that the gaseous product mainly contained H₂ and CO₂ with less amount of CH₄ and C₂H₄, and no CO was found. Temperature did not affect carbon gas efficiency

¹⁵ 1. Introduction

Fossil fuels are predominantly used today to fulfill the skyrocketing global demand for energy. Much of this energy demand is believed to be supplemented by biofuels produced from renewable sources. Renewable energy is a promising solution to the problem of depleting fossil fuel, global warming, and increasing energy consumption. Biomass is one of the potential renewable resources for this purpose, and hydrothermal gasification is a promising technology for biomass utilization so that it is converted to synthesis gas in an environmentally benign environment. In hydrothermal gasification, water is used both as a solvent and reaction medium with its thermophysical properties near its critical temperature (TC) and critical pressure (PC). Depending on the temperature and pressure of water, hydrothermal gasification processes employ subcritical (TC < 374 °C and PC < 22.1 MPa), near-critical (TC ~ 374 °C and PC ~ 22.1 MPa) and supercritical (TC > 374 °C and PC > 22.1 MPa) water ¹⁾. It should be noted that subcritical water exists at temperatures between the boiling point of water and its critical temperature. In this process, water is in the liquid state in subcritical conditions ²⁾. Among various biomass feedstock, sewage

sludge is the most promising wet biomass. Sewage sludge is the solid fraction of urban and industrial wastewater containing inorganic and organic substances. Various thermochemical technologies such as pyrolysis, liquefaction, torrefaction and carbonization have been employed to convert sewage sludge into beneficial secondary energy. Pyrolysis and liquefaction primarily generated bio-oil as the main liquid fuel product, whereas torrefaction and carbonization produced torrefied biomass or char as the main solid fuel ^{3–5)}. Different gasification technologies such as downdraft and updraft fixed beds, bubbling fluidized beds, double and triple stages have been also applied to gasified sewage sludge at the previous study. However, for high moisture content, these conventional gasification processes are not appropriate. Another problem of sewage sludge is the high ash content in sewage sludge. It has been pointed out as an obstacle both in fluidized bed and in the fixed bed gasification. To circumvent these problems, hydrothermal gasification should be the most appropriate to the best of our knowledge. Especially when it is operated under subcritical conditions, energy requirement for reactor operation can be minimized.

* Corresponding author: mat@hiroshima-u.ac.jp

By employing a continuous hydrothermal reactor, the pressure can be constantly controlled and the associated thermal phenomena readily levels the bed temperature avoiding ash slagging and clinkering⁶⁾. Unfortunately, gasification of sewage sludge in a hydrothermal continuous flow reactor has not been reported so much.

Therefore, in this study, experimental gasification of sewage sludge in hydrothermal continuous reactor under subcritical condition will be presented and discussion is made on the novelties including the detail effect of temperature and residence time on gasification characteristics of sewage sludge under subcritical conditions.

2. Experimental

The gasification of sewage sludge was carried out in a continuous flow reactor. The reactor was made of SS316 steel tubing (i.d., 2.17 mm; o.d., 3.18 mm and lengths 12 m). Initially, water was fed into the reactor. Subsequently, the pressure was increased to 25 MPa using a back-pressure regulator. After achieving a constant pressure of 25 MPa, the reactor temperature was set at desired temperature. The feedstock was then fed using the feeding system. The feedstock was fed into the system for 1 h prior to sample collection after steady-state. Gas samples were collected in vials and their compositions were determined. The gaseous product was characterized and quantified using gas chromatography (GC). Carbon dioxide and carbon monoxide were detected by GC with a thermal conductivity detector (GC-TCD) using helium as the carrier gas. Methane, ethane, and ethane were detected using GC with a flame ionization detector (GC-FID) using helium as the carrier gas. Hydrogen was detected by GC-TCD with nitrogen as the carrier gas. The liquid product was analyzed for the amounts of carbon in the liquid product (non-purgeable organic carbon, NPOC) and the dissolved carbon gas product (inorganic carbon, IC) by a total organic carbon (TOC) analyzer.

The experiment was conducted for sewage sludge concentration of 0.1 wt% under 300–350 °C, varies residence time (5–30 s), and fix pressure of 25 MPa.

Carbon gasification efficiency was defined as the ratio of the total carbon in the gas product to that in the feedstock solution.

3. Results and Discussion

The effect of reaction temperature and residence time on gasification efficiency is shown in Fig. 1. The carbon gasification efficiency of sewage sludge slightly increased with temperature and residence time employed here. Similar trend was observed by Dianningrum et al.⁷⁾, who worked on gasification of glycerol in hot compressed water with residence time ranging 15–120 min.

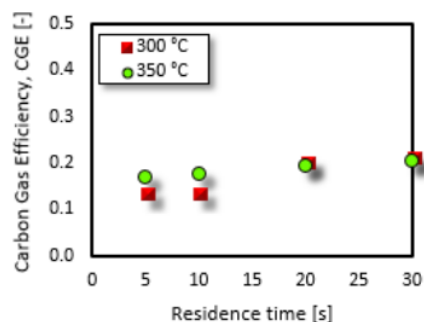


Fig.1. Effect of temperature and residence time on gasification efficiency.

The gaseous products were rarely found under subcritical conditions (300 and 350 °C). This is in good agreement with the results of Paksung and Matsumura⁸⁾, who showed that the gaseous product in case of xylose were rarely found under subcritical conditions. The gaseous products mainly contained H₂ and CO₂ with less amount of CH₄ and C₂H₄, and no CO was found. This in line with previous study of Seif et al.⁹⁾. They obtained the gas products mainly containing H₂ and CO₂ with less amounts of CH₄ and CO. Prolonging the reaction time at 300 °C resulted in slight reduction of hydrogen mole fraction on gas product. This is likely due to the fact that hydrogen is consumed through methanation reactions to produced methane.

4. Conclusion

Gasification of sewage sludge was conducted using a continuous flow reactor at 300 and 350 °C and the residence time in the range of 5–30 s under 25 MPa. The carbon gasification efficiency slightly increased when the temperature was increased from 300 to 350 °C. However, variation in reaction time did not have considerable effect on gas composition. The gaseous products mainly contained H₂ and CO₂ with less amount of CH₄ and C₂H₄, and no CO was found.

Acknowledgment

AA is grateful the financial support from Indonesia Endowment Fund for Education (LPDP) for PhD scholarship. The authors also thank the waste water treatment plant center in Higashi-Hiroshima, Japan. This study was partly supported by Tanigawa Fund.

References

- 1) Matsumura, Y.; Minowa, T.; Potic, B.; Kersten, S. R. A.; Prins, W.; Van Swaaij, W. P. M.; Van De Beld, B.; Elliott, D. C.; Neuenschwander, G. G.; Kruse, A.; et al. Biomass Gasification in near- and Super-Critical Water: Status and Prospects. *Biomass and Bioenergy* **2005**, *29* (4), 269.
- 2) Nanda, S.; Gong, M.; Hunter, H. N.; Dalai, A. K.; Gokalp, I.; Kozinski, J. A. An Assessment of Pinecone Gasification in Subcritical, near-Critical and Supercritical Water. *Fuel Process. Technol.* **2017**, *168* (June), 84.
- 3) Nanda, S.; Mohanty, P.; Kozinski, J. A.; Dalai, A. K. Physico-Chemical Properties of Bio-Oils from Pyrolysis of Lignocellulosic Biomass with High and Slow Heating Rate. *Energy Environ. Res.* **2014**, *4* (3), 21.
- 4) Wilk, M.; Magdziarz, A.; Gajek, M.; Zajemska, M.; Jayaraman, K.; Gokalp, I. Combustion and Kinetic Parameters Estimation of Torrefied Pine, Acacia and Miscanthus Giganteus Using Experimental and Modelling Techniques. *Bioresour. Technol.* **2017**, *243*, 304.
- 5) Wilk, M.; Magdziarz, A. Hydrothermal Carbonization, Torrefaction and Slow Pyrolysis of Miscanthus Giganteus. *Energy* **2017**, *140*, 1292.
- 6) Freda, C.; Cornacchia, G.; Romanelli, A.; Valerio, V.; Grieco, M. Sewage Sludge Gasification in a Bench Scale Rotary Kiln. *Fuel* **2018**, *212* (December 2016), 88.
- 7) Dianningrum, L. W.; Choi, H.; Kim, Y.; Jung, K.; Susanti, R. F.; Kim, J.; Sang, B. I. Hydrothermal Gasification of Pure and Crude Glycerol in Supercritical Water: A Comparative Study. *Int. J. Hydrogen Energy* **2014**, *39* (3), 1262.
- 8) Paksung, N.; Matsumura, Y. Decomposition of Xylose in Sub- and Supercritical Water. *Ind. Eng. Chem. Res.* **2015**, *54* (31), 7604.
- 9) Saif, S.; Tavakoli, O.; Fatemi, S.; Bahmanyar, H. Subcritical Water Gasification of Beet-Based Distillery Wastewater for Hydrogen Production. *J. Supercrit. Fluids* **2015**, *104*, 212.

Gasification Characteristics of Sewage Sludge in Water under Subcritical Conditions

ORIGINALITY REPORT

15%

SIMILARITY INDEX

10%

INTERNET SOURCES

12%

PUBLICATIONS

0%

STUDENT PAPERS

PRIMARY SOURCES

- | | | |
|---|---|----|
| 1 | eprints-phd.biblio.unitn.it
Internet Source | 1% |
| 2 | www.ideals.illinois.edu
Internet Source | 1% |
| 3 | WWW.MDPI.COM
Internet Source | 1% |
| 4 | Thomas N Julian, Gaylen M Zentner.
"Ultrasonically mediated solute permeation through polymer barriers", Journal of Pharmacy and Pharmacology, 1986
Publication | 1% |
| 5 | Dragan Knezevic. "Hydrothermal conversion of biomass", 'University Library/University of Twente', 2009
Internet Source | 1% |
| 6 | Mi Yan, Dwi Hantoko, Ekkachai Kanchanatip, Rendong Zheng, Yingjie Zhong, Ishrat Mubeen. "Valorization of sewage sludge through catalytic sub- and supercritical water | 1% |

gasification", Journal of the Energy Institute,
2020

Publication

7	coek.info Internet Source	1 %
8	hal-mines-albi.archives-ouvertes.fr Internet Source	1 %
9	www.ncbi.nlm.nih.gov Internet Source	1 %
10	Benyong Han, Fang Yin, Shiqing Liu, Xingling Zhao, Jing Liu, Changmei Wang, Hong Yang, Wudi Zhang. "Synthesis and Optimization of Methyl Laurate Using Sulfonated Pyrrolidonium Ionic Liquid as a Catalyst", International Journal of Chemical Reactor Engineering, 2019 Publication	1 %
11	Ziming Liu, Song Li, Yongdan Wang. "Waste engine oil and polyphosphoric acid enhanced the sustainable self-healing of asphalt binder and its fatigue behavior", Journal of Cleaner Production, 2022 Publication	1 %
12	Douglas. "Sex-Steroid Induction of Endogenous Opioid Inhibition on Oxytocin Secretory Responses to Stress", Journal of Neuroendocrinology, 4/2000 Publication	1 %

13 Ploeger, J.M.. "Co-oxidation of methylphosphonic acid and ethanol in supercritical water I: Experimental results", *The Journal of Supercritical Fluids*, 200612
Publication 1 %

14 mail.scialert.net
Internet Source 1 %

15 "Biorefinery of Alternative Resources: Targeting Green Fuels and Platform Chemicals", Springer Science and Business Media LLC, 2020
Publication 1 %

16 Sonil Nanda, Sivamohan N. Reddy, Howard N. Hunter, Ian S. Butler, Janusz A. Kozinski. "Supercritical Water Gasification of Lactose as a Model Compound for Valorization of Dairy Industry Effluents", *Industrial & Engineering Chemistry Research*, 2015
Publication 1 %

17 Yukihiro Matsumura, Masaki Harada, Kyoko Nagata, Yoshihiro Kikuchi. "EFFECT OF HEATING RATE OF BIOMASS FEEDSTOCK ON CARBON GASIFICATION EFFICIENCY IN SUPERCRITICAL WATER GASIFICATION", *Chemical Engineering Communications*, 2006
Publication 1 %

Exclude quotes On

Exclude matches < 1%

Exclude bibliography On