

# LATERAL LOAD CAPACITY OF STEEL TRUSS COUPLING BEAM

*by* Ahmad Saiful Haqqi

---

**Submission date:** 18-Jul-2022 10:11AM (UTC+0700)

**Submission ID:** 1871902201

**File name:** 3\_Geomate\_Lateral\_Load\_Capacity.pdf (366.37K)

**Word count:** 4411

**Character count:** 22154

## LATERAL LOAD CAPACITY OF STEEL TRUSS COUPLING BEAM

\*Nursiah Chairunnisa<sup>1,2</sup>, Iman Satyarno<sup>1</sup>, Muslikh<sup>1</sup> and Akhmad Aminullah<sup>1</sup>

3

<sup>1</sup>Civil and Environmental Engineering Department, Faculty of Engineering, Universitas Gadjah mada, Indonesia

<sup>2</sup>Civil Engineering, Faculty of Engineering, Lambung Mangkurat University, Indonesia

\*Corresponding Author, Received: 9 Aug. 2017, Revised: 28 Aug. 2017, Accepted: 8 Sept. 2017

**ABSTRACT:** The utilizing of steel truss coupling beam is one of an alternative for coupling beam in coupled shearwall. This paper presents an experimental study of steel truss coupling beam with span to depth ratios of 1.78 that tested under lateral cyclic loading at the laboratory. The objective of this research is to study the behaviour of steel truss coupling beam in coupled shearwall. The specimen are designed considering several factors such as span to depth ratio, strength of material, the dimension of double steel angle profile as horizontal members and steel angle profile as diagonal members. It has been shown from the test that the strength capacity of steel truss coupling beam specimens can not reach ultimate load because of inelastic buckling. Experimental results show that steel truss coupling beam can have fairly well behaviour under cyclic loading. By enlarging the dimension of horizontal members and diagonal members without increasing the thickness of profile, the strength capacity of all coupling beam specimen will have different behaviour. The result shows that the specimen with larger dimension of profile exhibits slightly raising of strength capacity than specimen with smaller dimension. The envelope curve decrease gradually which represent the specimens have well performance in terms of dissipation energy. More over, increasing appropriate dimension of diagonal and horizontal members for steel truss coupling beam with shearwalls can determine and classify the structural performance level of structure.

*Keywords:* Coupling beam, Steel truss, Angle steel profile, Strength capacity

### 1. INTRODUCTION

A coupling beam works as a link beam between two shear walls namely coupled shearwall which can absorb more seismic energy and attain plastic hinge mechanism before coupled shearwalls yield when an earthquake happens. According to the researchs, the structural strength of coupling beams can affect the behaviour of coupled shearwall. Paulay [1] described that the failure mechanism of coupling beam with small span to depth ratio is different with regular concrete beam. Previous experimental studies suggested the use of diagonally bars for reinforcing of coupling beam to resist lateral loading. Generally, the conventional coupling beam or namely diagonally reinforced concrete coupling beam can be defined as coupling beam with used a group of diagonal reinforcement as main bars that confined with transverse bars and reinforced concrete for lower span to depth ratio. Moreover, Indonesian building code SNI 2847:2013 [2] also suggests to use diagonal reinforcement for coupling beam with span to depth ratio less than two. Although many codes offer an alternatives reinforcements, but all configuration still difficult to construct.

Steel truss coupling beam is a reliable alternative for replacing the conventional coupling beam. Previous studies [3,4,5] investigated the behaviour of steel coupling beam on solid web

steel and the experimental results showed that steel coupling beams indicate well behaviour in stiffness, energy dissipation and strength capacity. Moreover, cyclic behavior of very short shear link and replaceable steel coupling beam also reported by [6,7]. The results indicated that a short steel link and replaceable steel coupling beams can provide stable hysteretic behaviour and ductile under cyclic loading. Furthermore, Lin et al [8] investigates steel truss coupling beam with opening that using T-Stub chord members and angle web members. The experimental analysis indicates that steel truss coupling beam also represents good performance in terms of ductility and energy dissipation.

Based on the previous studies, this research puts forward the steel truss coupling beam that assembled from double steel angle profile as horizontal members and steel angle as diagonal members. Experimental test of steel truss coupling beams under lateral loading was described in this research in order to investigate the behaviour of steel truss coupling beams.

### 2. METHODS

#### 2.1 Design of Specimen

The specimen of steel truss coupling beams are created considering several factors such as

horizontal and diagonal members contribution. The strength capacity of steel truss coupling beam is provided by double steel angle profile as horizontal members and a steel angle profile as diagonal members.

The relationship between flexure and shear according Fig.1 can be obtained by Eq.(1). The horizontal force component ( $F_h$ ) can be calculated by using Eq.(2).

$$V_u = \frac{2M_u}{l_n} \quad (1)$$

$$F_h = \frac{M_u}{h} \quad (2)$$

where  $V_u$  = shear capacity of coupling beam,  $l_n$  = coupling beam clear span,  $M_u$  = ultimate flexural strength and  $h$  = the height of coupling beam.

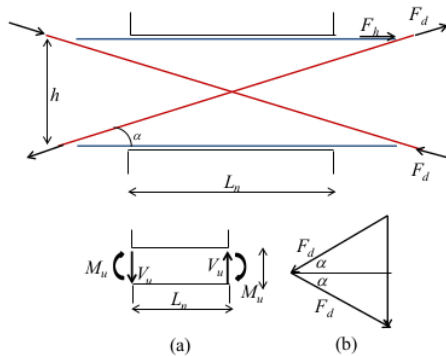


Fig. 1. Relationship between shear and flexure of coupling beam (a) external actions, (b) internal forces

The diagonal force contribution ( $F_d$ ) can be calculated by Eq.(3)

$$F_d = \frac{V_u}{2 \sin \alpha} = \frac{M_u}{l \sin \alpha} \quad (3)$$

From the above of equations, the area of diagonal members  $A_d$  and horizontal members  $A_h$  can be created using Eqs.(4) and (5) if buckling is neglected.

$$A_d = \frac{F_d}{f_y} \quad (4)$$

$$A_h = \frac{F_h}{f_y} \quad (5)$$

## 2.2 Detail of Specimens

In this experiment, the steel truss coupling beams were tested under lateral cyclic loading to evaluate behaviour of steel truss coupling beams. The specimens consisted of scaled steel truss

coupling beams and two stiff reinforced concrete member as structural walls. Prototype structure was adopted from previous research [9] and the coupling beam shear force that estimated from frame analysis according to [10] were chosen to be the models with scale of 1:2.5 as specimens of the coupling beams. The serial numbers of specimens were STCB 1 and STCB 2. STCB 1 is a specimen of steel truss coupling beam with the use of 2L.30x30x3 for horizontal members and L.30x30x3 for diagonal members. STCB 2 is a specimen of steel truss coupling beam with 2L.35x35x3 as horizontal members and L.35x35x3 as diagonal members. The span to depth ratios of specimens is 1.78 for ensuring a shear behaviour mechanism for evaluating the seismic response of steel truss coupling beam that designed using the area of horizontal and diagonal members. Detailed configuration dimensions of steel truss coupling beams are presented in Figs.2 and 3, see also Table 1.

Table 1. Detail of specimens STCB 1 and STCB 2

Specimens	Span to depth ratio	Horizontal Member	Diagonal Member
STCB 1	1.78	2L.30x30x3	L.30x30x3
STCB 2	1.78	2L.35x35x3	L.35x35x3


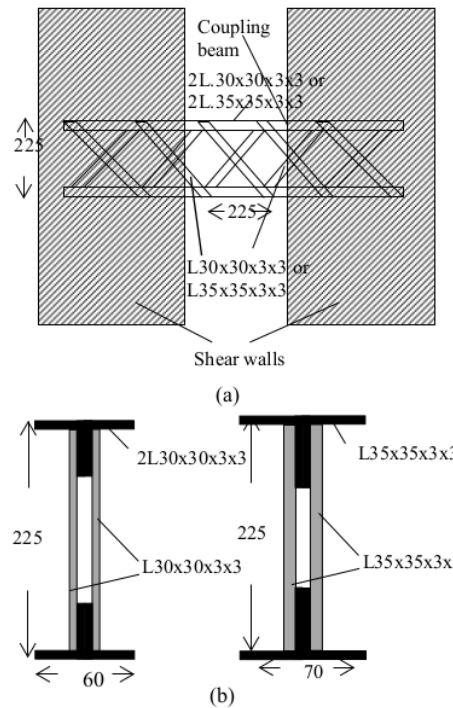


Fig. 2. Cross section of specimens (a). STCB 1, (b) STCB 2

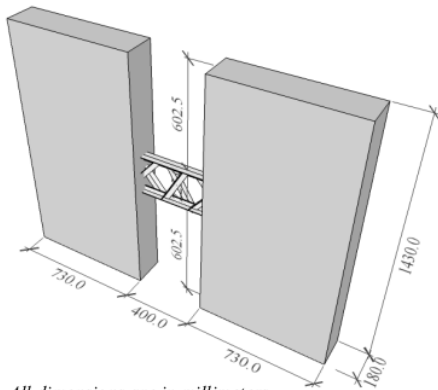

All dimensions are in millimeters

Fig. 3. 3D sketch of specimen of steel truss coupling beam and shear walls

### 2.3 Mechanical Properties

The mechanical properties of steel of specimens is presented in Table 2.

Steel types	Steel Angle	Steel Angle
	L.30x30x3	L.35x35x3
Yield Strength (MPa)	356.2	390.5
Ultimate Strength (MPa)	502.0	536.4

### 2.4 Test Set up and Loading History

Experimental testing was conducted in Structural Laboratory in Civil and Environmental Engineering Department of Gadjah Mada University. Lateral load was produced by an actuator that was fastened to steel loading frame. Figure 4 depicts the detail of set up test of specimens that based on previous research [11].

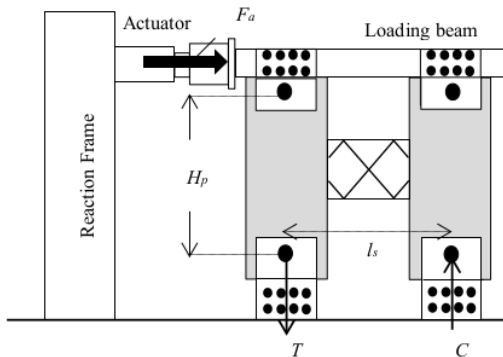


Fig. 4. Schematic Test Set Up

As illustrated in Fig.4, the relationship between actuator load ( $F_a$ ) and shear force on the coupling beam ( $V_{cb}$ ) can be simulated by Eq.(6) and Eq.(7)

$$F_a H_p = T l_s \quad (6)$$

$$\frac{F_a H_p}{l_s} = V_{cb} \quad (7)$$

where  $T$  = tension force that created in wall sections. The dimension of structural wall for all specimens were determined to be 143x73 cm.  $H_p$  can be defined as distance between top and bottom support of test set up and was measured to be 117.5 cm. Furthermore,  $l_s$  was chosen to be 113 cm and it can be explained as distance between the central of two wall section. Finally, the formulation to estimate shear force on the coupling beam can be described by Eq.(8).

$$1.04 F_a = V_{cb} \quad (8)$$

A quasi static lateral load with increasing displacement amplitudes was applied in this specimens. The loading was based on displacement control according to ACI T-11-01 [12] until the end of testing which shown in Fig.5. The series of test in loading history is intended to determine that horizontal load was increased gradually in step. Specimens was loaded and unloaded in the same displacement in each step. There were three loading cycles in each step.

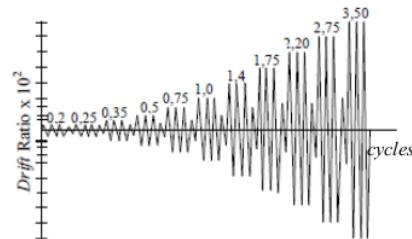


Fig. 5. Loading History of Specimen [12]

## 3. RESULT AND DISCUSSION

### 3.1 Diagonal Force Capacity

The diagonal and horizontal forces of both specimens (STCB 1 and STCB 2) were calculated according to Eqs.2 and 3. Meanwhile, the capacity of diagonal compressive strength determined by the buckling of steel angle profile according to SNI 1729: 2015 [13] as specification for structural steel building and the guideline in Indonesia which

refers to AISC 2010 [14]. Diagonal compressive strength of profile can be classified as nonslender element and slender element section. Buckling failure of members without slender element can be calculated Eqs 9 until 11.

$$P_n = F_{cr} A_g \tag{9}$$

$$\frac{Kl}{r} \leq 4.71 \sqrt{\frac{E}{f_y}} \text{ (or } \frac{f_y}{F_e} \leq 2.25)$$

$$F_{cr} = \left[ 0.658 \frac{f_y}{F_e} \right] \tag{10}$$

$$\frac{Kl}{r} > 4.71 \sqrt{\frac{E}{f_y}} \text{ (or } \frac{f_y}{F_e} > 2.25)$$

$$F_{cr} = 0.877 F_e \tag{11}$$

where  $P_n$  = the nominal compressive strength / the capacity of diagonal member (kN),  $F_{cr}$  = the critical stress (MPa),  $f_y$  = yield stress of steel (MPa),  $F_e$  = elastic buckling stress (MPa) determined according to elastic buckling analysis by Eq.12.

$$F_e = \frac{\pi^2 E}{\left( \frac{Kl}{r} \right)^2} \tag{12}$$

where  $K$  = effective length factor,  $l$  = length of member (mm) and  $r$  = radius of giration (mm). Effective slender ratio  $Kl/r$  for steel angle profile can be determined in accordance with section E-5 [13].

Moreover, the diagonal force for members with slender element should be corrected by net reduction factor,  $Q = Q_s Q_a$ , which can be written by Eqs. 13 and 14.

$$\frac{Kl}{r} \leq 4.71 \sqrt{\frac{E}{Q f_y}} \text{ (or } \frac{Q f_y}{F_e} \leq 2.25)$$

$$F_{cr} = Q \left[ 0.658 \frac{Q f_y}{F_e} \right] \tag{13}$$

$$\frac{Kl}{r} > 4.71 \sqrt{\frac{E}{Q f_y}} \text{ (or } \frac{Q f_y}{F_e} > 2.25)$$

$$F_{cr} = 0.877 F_e \tag{14}$$

where  $Q_s$  is net reduction factor for slender unstiffened element and  $Q_a$  is reduction factor for slender stiffened element. For steel angle profile that included as unstiffened slender element,  $Q = Q_s (Q_a = 1)$  and  $Q_s$  can be predicted according to Eqs 15 until 17.

$$\frac{b}{t} < 0.45 \sqrt{\frac{E}{f_y}}, Q_s = 1 \tag{15}$$

$$0.45 \sqrt{\frac{E}{f_y}} < \frac{b}{t} < 0.91 \sqrt{\frac{E}{f_y}}$$

$$Q_s = 1.34 - 0.76 \left( \frac{b}{t} \right) \sqrt{\frac{f_y}{E}} \tag{16}$$

$$\frac{b}{t} > 0.91 \sqrt{\frac{E}{f_y}}, Q_s = \frac{0.53 E}{f_y \left( \frac{b}{t} \right)^2} \tag{17}$$

Table 3 shows the comparison of compressive strength of diagonal element based on analytical theory and experimental results, where  $V_{Dy}$  = shear force design of coupling beam,  $F_{Dy}$  = yield compressive strength for diagonal element,  $V_{cr}$  = critical shear force for coupling beam and  $F_{cr}$  = critical compressive strength for diagonal element.

Table 3. Comparison result strength capacity of steel truss coupling beams

Type of specimens	$V_{Dy}$	Theory (kN)			Eksperimental (kN)	
		$F_{Dy}$	$V_{cr}$	$F_{cr}$ [11]	$V_{cr}$	$F_{cr}$
STCB 1	77.93	55.11	37.32	26.40	37.23	26.32
STCB 2	89.48	63.27	40.96	28.97	38.68	27.35

From Table 3, it can be concluded that the strength capacity of steel truss coupling beam specimens can not reach ultimate load because of inelastic buckling.

### 3.2 Failure Mechanism

At the beginning of loading, horizontal load was raised incrementally in accordance with the increasing of displacement. Failure mechanism of specimens were determined as buckling in the diagonal members that can be shown from visual observation. During the test, diagonal members

were compressed and tensed alternately as the diagonal members buckled and get back in the original shape when unloaded.

Specimen STCB 1 exhibited buckling failure mechanism that can be pointed by buckling almost of diagonal members. and in the next step of loading after buckling of diagonal members was substansial, horizontal members also started buckling. Furthermore, in the final step of loading, the buckling of diagonal members were severe. From the observation, STCB 1 can be categorized by buckling failure mechanism. The ultimate strength that can be reached of specimen STCB 1

was 37.23 kN at drift ratio maximum 1.0% . On the other hand, the failure mechanism of STCB 2 slightly different with STCB 1. In the early of loading, STCB 2 also indicated buckling on the both of diagonal members. At the advanced of loading, the horizontal members indicated slightly bending but still in fairly well condition. Finally, the buckling of diagonal members were severe on the end of test and can be drawn as inelastic buckling failure mechanism. The ultimate strength of STCB 2 is 38.68 kN at drift ratio maximum 0.5%.

2 The failure pattern of both specimens were governed by buckling mechanism because the diagonal members collapsed before horizontal members. More over, it can be drawn that the enlarging dimension of profile without adding the thickness of profile exhibited slightly enhancement of coupling beam capacity . Finally, the specimens cannot reach the shear force design. Failure condition of test specimen in the end of testing was described in Fig.6.



(a)



(b)

Fig. 6. Coupling beams after test  
(a) STCB 1, (b) STCB 2


### 3.3 Hysteretic Performance

The hysteretic performance of specimens are shown in Fig.7, which shows the relationship between load and displacement of specimens of shearwall with steel truss coupling beams


In the early stage of loading, the shape of hysteretic curve tend to be similar in each step displacement. It means that specimens still in the elastic region that can be indicated with small

deformation of coupling beams. When diagonal member was buckling , the shape of hysteretic curve also changed with the area of curve become larger than initial condition.

Fig.7 shown that enlarging the dimension of horizontal and diagonal members of steel truss without adjusted the thickness of profile can slightly raise the strength capacity of steel truss, but can improve the stiffness of steel truss coupling beam.

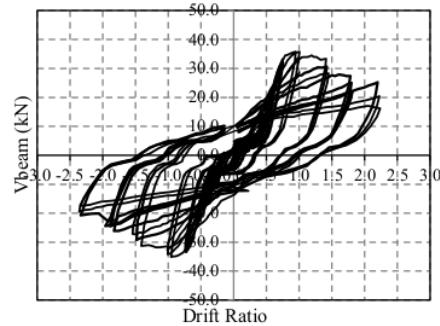

(a)

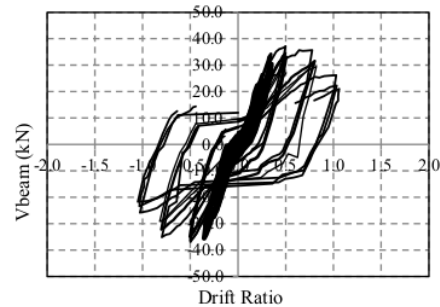

(b)

Fig. 7. Hysteretic Curve of Coupling Beams  
(a) STCB 1, (b) STCB 2

### 3.4 Analysis of Envelope Curves

According to ASTM E 2126-02a [15], Equivalent Energy Elastic Plastic Curve (EEEEPC) can be used for estimating the performance parameters of specimens that can be shown in Fig. 8. Yield load and elastic stiffness of specimens can be predicted from EEEPC. Elastic stiffness can be calculated by Eq.18, where  $P_{peak}$  = the maximum load and  $\Delta_{0.4P_{peak}}$  = displacement when the load equal with 40% maximum load.

$$k_e = \frac{0.4P_{peak}}{\Delta_{0.4P_{peak}}} \quad (18)$$

The yield load of specimen can be determined by Eq.19, where  $P_{yield}$  is the yield load of specimen,  $A$

defined as the area under load displacement curve from zero to ultimate displacement and  $\Delta u$  is displacement when structural bearing capacity decline to 80% ultimate displacement.

$$P_{yield} = \left( \Delta_u - \sqrt{\Delta_u^2 - \frac{2A}{k_e}} \right) k_e \quad (19)$$

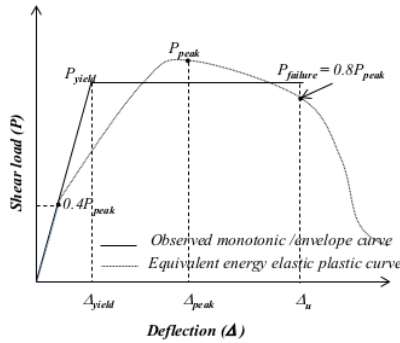


Fig. 8. EEEPC Curve of specimens [15]

Table 4 and Table 5 present yield loads, yield displacements, ultimate loads, ultimate displacements, failure loads and failure displacements that can be estimated when the load decline to 80% ultimate loads based on Equivalent Energy Elastic Plastic Curve (EEEPC). All specimens for tension loading and compression loading.

Table 4. Strength capacity of specimens steel truss coupling beams on the tension loading

Criteria	Code of specimens		
	STCB 1	STCB 2	
Yield	V <sub>beam</sub> (kN)	26.04	32.06
	Disp (mm)	10.35	4.06
Ultimate	V <sub>beam</sub> (kN)	37.23	38.68
	Disp (mm)	12.11	6.37
Failure	V <sub>beam</sub> (kN)	29.78	30.95
	Disp (mm)	21.82	11.95

Table 5. Strength capacity of specimen steel truss coupling beams on the compression loading

Criteria	Code of specimens		
	STCB 1	STCB 2	
Yield	V <sub>beam</sub> (N)	28.42	32.78
	Disp (mm)	9.57	3.97
Ultimate	V <sub>beam</sub> (N)	36.50	38.37
	Disp (mm)	12.25	6.37
Failure	V <sub>beam</sub> (N)	29.20	30.70
	Disp (mm)	21.35	11.98

Figure 9 shows the backbone curve of specimens. Backbone curve describes the relationship between strength capacity and drift ratio of specimen that taken from the first cycle of each drift of cyclic loading history of specimen. From the Fig.9, it can be described that the

envelope curves decrease gradually which represent the specimens have well performance in terms of dissipation energy of specimens.

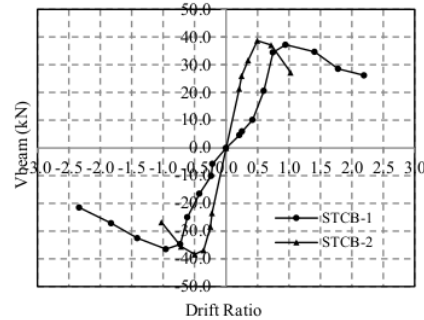


Fig. 9. Backbone curve of specimens steel truss coupling beams

### 3.5 Ductility Factor

The ductility factor  $\mu$  is normally calculated from  $\mu = \delta_u / \delta_y$ , where  $\delta_u$  is the ultimate lateral displacement when structural bearing capacity decline to 80% ultimate bearing capacity,  $\delta_y$  is yield lateral displacement. However proposed a method to calculate the ductility factor according to research by Satyarno [16], can be expressed by Eq.20.

$$\mu_u = \frac{T_{eff}^2}{T_1^2} \quad (20)$$

$T_1$  is the elastic fundamental period of the structure that can be calculated by Eq.21 and  $T_{eff}^*$  is defined as the effective period of the structure that can be estimated by Eq.22.

$$T_1 = 2\pi \sqrt{\frac{M^*}{K_{elastic}^*}} \quad (21)$$

$$T_{eff}^* = 2\pi \sqrt{\frac{M^*}{K_{eff}^*}} \quad (22)$$

$M^*$ ,  $K_{elastic}^*$  and  $K_{eff}^*$  are the equivalent mass, elastic stiffness and equivalent effective stiffness respectively. Substituting the Eqs. 21 and 22 into Eq. 20, ductility factor of structure can be expressed by Eq.23.

$$\mu_u = \frac{K_{elastic}^*}{K_{eff}^*} \quad (23)$$

Table 6 provides the calculated ductility factor of specimens with using Eq. 23.

Table 6. Ductility factor of specimens

Code of specimens	Ductility Factor	
	Compression load	Tension load
STCB 1	2.02	2.20
STCB 2	3.05	3.22

According to this calculation, the ductility factor in the compression load for STCB 1 was 2.02 and for tension load was 2.20. The ductility factor of STCB 2 for compression and tension load were 3.05 and 3.22 respectively. In accordance with FEMA 306 [17], all specimen of steel truss coupling beams can be classified as moderate ductility.

**3.6 Dissipation Energy**

In order to measure the energy dissipation of specimens, Equivalent Viscous Damping Ratio (EVDR) was calculated for all specimen of coupling beams. A higher value of EVDR means that the specimen has greater ability of dissipation energy. Definition of EVDR can be shown by Fig 10 and Eq.24.

$$EVDR = \frac{HE}{2\pi PE} \tag{24}$$




Fig. 10. Definition of Equivalent Viscous Damping Ratio [8]

where HE is the ability of structure to save energy that can be predicted with the loop area of ABC and ACD. PE is energy potential of structure that can be estimated with the triangle area of OBE and OFD. The curve in Fig.11 shows the relationship between EVDR and the displacement for specimens. Specimen STCB 1 and STCB 2 show the raising level of dissipation energy with increased displacement. The value of Equivalent Viscous Damping Ratio (EVDR) of STCB1 is smaller than STCB 2 at the same displacement.

Table 7. Structural performance levels for concrete walls with coupling beam [19]

Type	Structural performance levels		
	Collapse Prevention (CP)	Life Safety (LS)	Immediate Occupancy (IO)
Drifts	2% transient or permanent	1% transient, 0.5% permanent	0.5% transient; negligible permanent

Table 8. Structural performance levels (Experimental result)

Criteria	STCB-1	STCB-2
P <sub>(Lateral Load)</sub> (kN)	35.80	37.20
V <sub>coupling beam</sub> (kN)	37.23	38.68
Drift Ratio (%)	1.0	0.5
Structural performance levels	Life safety (LS)	Immediate Occupancy (IO)

According to Paz [18], the damping ratio of structural system is usually less than 20% of critical damping. It means that specimens of steel truss coupling beams have good energy dissipation capacity.

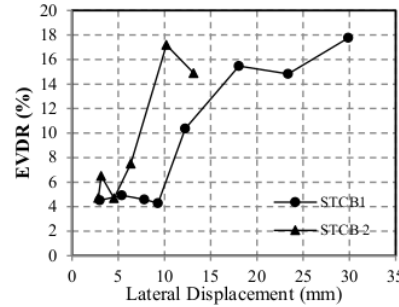


Fig. 11. Energy Dissipation Ratio of Specimens

**3.7 Structural Performance Level**

FEMA 356 [19] defines three level of structural performance for determining the condition of structure. These are immediate occupancy (IO), life safety (LS) and collapse prevention (CP). Immediate occupancy (IO) can be explained as the post earthquake damage with minimal structural damage has developed. More over, Life safety (LS) is defined as the post earthquake damage with significant structural damage has occurred. Several component and element structure are damage. Collapse prevention (CP) is defined as the post earthquake damage state with the structure is on the close to partial or total collapse. Substantial damage of structure such as degradation stiffness and large permanent lateral deformation of structure were occurred.

Table 7 shows structural performance level for concrete walls with coupling beam according to FEMA 356 [19]. Table 8 describes the state of structural performance of specimens.



Table 8 shows that structural performance level of specimen of STCB 1 can be categorized as Life Safety (LS) level with drift ratio maximum at 1.0%. Meanwhile, specimen of STCB 2 is classified as Immediate Occupancy (IO) level with drift ratio maximum at 0.5% .

#### 4. CONCLUSION

This paper focused on the steel truss coupling beams in coupled shearwall. The following conclusion were drawn :

1. Enlarging the dimension of horizontal and diagonal members of steel truss without increasing the thickness of profile exhibited slightly enhancement of strength capacity of steel truss coupling beam.
2. The ductility factor of specimens steel truss coupling beams can be classified as moderate ductility .
3. From the backbone curve and the calculation of equivalent viscous damping ratio , specimens steel truss coupling beams have well performance of energy dissipation capacity.
4. Increasing appropriate dimension of diagonal and horizontal members for steel truss coupling beam with shearwalls can determine and classify the structural performance level of system.

#### 5. ACKNOWLEDGEMENT

The study presented in this paper was supported by Doctoral Dissertation Research Grant Program under contract number. 119/UN8.2/PL/2017 that funded by the Ministry of Research, Technology and Higher Education of the Republic of Indonesia.

#### 6. REFERENCES

- [1] Park R and Paulay T., Reinforced Concrete Structures, John Wiley & Sons, A Wiley Interscience Publication), 1974.
- [2] SNI 2847:2013., Persyaratan Beton Struktural untuk Bangunan Gedung, BSN, Jakarta, 2013
- [3] Shahrooz B.M, Remmetter M.E and Qin F., Seismic Design and Performance of Composite Coupled Walls, in Journal of Structural Engineering, Vol 119, No 11, November 1993.
- [4] Harries K.A, Mitchell D, Cook W.D and Redwood R.G., Seismic Response of Steel Beams Coupling Concrete Walls, in Journal of Structural Engineering, Vol 119, No 12, December 1993.
- [5] Fortney P.J., The Next Generation of Coupling Beams, Ph.D Thesis, University of Cincinnati, 2005.
- [6] Ji, X., Wang, Y., Ma, Q., and Okazaki, T., Cyclic behavior of very short steel shear links, J. Struct.Eng, Vol.142, 2016.
- [7] Ji, X., Wang, Y., Ma, Q., and Okazaki, T., Cyclic Behavior of Replaceable Steel coupling Beam, J. Struct.Eng, Vol.143, 2017.
- [8] Lin Q, Deng Z and Tang G., Experimental Study on Seismic Behaviour of Full-scale New Steel Truss Coupling Beams, in Advanced Material Research Vols 163-167, 2011, pp. 2041-2046.
- [9] Paulay T and Priestley M.J.N., Seismic Design and Reinforced Concrete and Masonry Building, John Willey and Sons Inc, Canada, 1992.
- [10] Chairunnisa N, Satyarno I, Muslikh and Aminullah A., Analysis and Design Shear wall Coupling Beam Using Hybrid Steel Truss Encased In Reinforced Mortar, Procedia Engineering 171, 2017, pp 940-947.
- [11] Ihtiyar O., Force Deformation Behaviour of Conventionally Reinforced Coupling Beams, Master.thesis. University of Massachusetts Amherst, 2006
- [12] ACI Innovation Task Group 1 and Collaborators., Acceptance Criteria for Momen Frames Based on Structural Testing, American Concrete Institute, 2001
- [13] SNI 1729:2015., Spesifikasi untuk Bangunan Gedung Baja Struktural, BSN, Jakarta, 2015
- [14] AISC (2010)., Specification for Structural Steel Building, Chicago, Illinois, 2010.
- [15] ASTM E2126-02a., Standar Test Methods For Cyclic (Reversed) Load Test for Shear Resistance of Walls for Buildings.
- [16] Satyarno I., Adaptive Pushover Analysis for The Seismic Assessment of Older Reinforced Concrete Building, Ph.D Thesis. University of Canterbury, New Zealand, 2000.
- [17] FEMA 306., Evaluation of Earthquake Damaged Concrete and Masonry Wall Buildings, Applied Technology Council (ATC-43 Project), California, 1998.
- [18] Paz M., Dinamika Struktur, Teori dan Perhitungan Edisi Kedua, Erlangga, Jakarta, 1990.
- [19] FEMA 356., Prestandard and Commentary for The Seismic Rehabilitation of Buildings , American Society of Civil Engineers Council (ASCE), Washington D.C, 2000.

Copyright © Int. J. of GEOMATE. All rights reserved, including the making of copies unless permission is obtained from the copyright proprietors.

# LATERAL LOAD CAPACITY OF STEEL TRUSS COUPLING BEAM

## ORIGINALITY REPORT

8%

SIMILARITY INDEX

9%

INTERNET SOURCES

4%

PUBLICATIONS

5%

STUDENT PAPERS

## PRIMARY SOURCES

1	Submitted to School of Business and Management ITB Student Paper	3%
2	<a href="http://etd.repository.ugm.ac.id">etd.repository.ugm.ac.id</a> Internet Source	1%
3	<a href="http://www.matec-conferences.org">www.matec-conferences.org</a> Internet Source	1%
4	<a href="http://www.yumpu.com">www.yumpu.com</a> Internet Source	1%
5	El-Tawil, Sherif, Christopher Kuenzli, Mohamed Hassan, and Sashi Kunnath. "Inelastic Behavior of Hybrid Coupled Walls", Composite Construction in Steel and Concrete IV, 2002. Publication	1%
6	<a href="http://a1a4b511-59b5-4863-9796-fe2c7c8d61eb.filesusr.com">a1a4b511-59b5-4863-9796-fe2c7c8d61eb.filesusr.com</a> Internet Source	1%
7	<a href="http://www.scribd.com">www.scribd.com</a> Internet Source	1%

8

jonuns.com

Internet Source

1 %

---

9

www.irbnet.de

Internet Source

1 %

---

---

Exclude quotes Off

Exclude matches < 1%

Exclude bibliography Off