

THE INFLUENCE OF GIVING LIME AND FERTILIZER TO THE WATER QUALITY OF THE ACID- SULPHATE AGRICULTURE LAND MODEL

by Ahmad Saiful Haqqi

Submission date: 17-Apr-2023 08:23AM (UTC+0700)

Submission ID: 2066467955

File name: Achmad_Helda_Rismawidha_ISLT_2014_ok.pdf (3.81M)

Word count: 5324

Character count: 35900

*Proceedings of the 9th International Symposium
on*

LOWLAND TECHNOLOGY



9th ISLT 2014

"Problems and Remedial measures of Lowland"

September 29 - October 1, 2014
Saga, Japan



International Association
of Lowland Technology



Institute of Lowland and
Marine Research (ILMR)



Saga University

Organized By:

International Association of Lowland Technology (IALT)
Institute of Lowland and Marine Research (ILMR)
Saga University, Saga, Japan

ISLT 2014

Proceedings ² of the 9th International Symposium

on

LOWLAND TECHNOLOGY

September 29–October 1, 2014
Saga, Japan

ORGANIZED ¹⁷ BY:



International Association of Lowland Technology
(IALT)



Institute of Lowland and Marine Research
(ILMR)



Saga University, Saga, Japan

IN COLLABORATION WITH:

Lowland Research Association

¹¹ Department of Civil Engineering and Architecture, Saga University

Western Branch, Japan Society of Civil Engineers

Kyushu-Okinawa Branch, Japan Society on Water Environment

3

Proceedings of the International Symposium on

LOWLAND TECHNOLOGY 2014

PEER REVIEWED

Editors-in-Chief: Prof. H. Araki, Prof. D.T. Bergado, Prof. T. Hino and Prof. N. Mishima
Associate Editors: Prof. H. Yamanishi, Dr. D. Suetsugu, Dr. N. Vongthanasunthorn,
Dr. S. Manandhar, Dr. L.G. Lam, Dr. Y. Mishima, Dr. Y. Nagahama and
Dr. N.T.N. Truc

Published by:

16

Institute of Lowland and Marine Research (ILMR), Saga University

Honjo 1, Saga 840-8502, Japan

Tel: 81-952-28-8582

Fax: 81-952-28-8189

Email: ialt@ilt.saga-u.ac.jp

URL: <http://www.ilt.saga-u.ac.jp/ialt/index.html>

13

Every paper published in the proceedings was peer reviewed by two referees in the appropriate professional field.

13

The Institute of Lowland Technology is not responsible for the opinion expressed by various authors in their contributions presented in the Proceedings.

ISBN: 4-921090-06-8

Printed in Japan

Front Cover Photo Courtesy: Saga Prefecture (Ariake Sea Coastal road Development Office); Back Cover Photo Courtesy: Furukawa Total Printing Co., Ltd.

International Symposium on Lowland Technology

ISLT 2014

Organizing Committee, Chairman: Prof. H. Araki (Japan)

Prof. H. Araki (Japan)

Prof. D.T. Bergado (Japan)

Prof. H. Yamanishi (Japan)

Prof. T. Hino (Japan)

Prof. K. Hokao (Japan)

Prof. K. Koga (Japan)

Prof. N. Mishima (Japan)

Dr. D. Suetsugu (Japan)

Dr. S. Manandhar (Japan)

Dr. L.G. Lam (Japan)

Dr. N.T.N. Truc (Japan)

Dr. Y. Mishima (Japan)

Dr. M.A. Moqsud (Japan)

Dr. N. Vongthanasunthorn (Japan)

Dr. Y. Nagahama (Japan)

Mr. K. Ogata (Japan)

Organizing Secretaries:

M. Yahiro, K. Kusaba, A. Egashira and Y. Goda (Japan)

International Advisory Committee

Prof. M.R. Madhav (India)

Prof. J.P. Carter (Australia)

Prof. H.B. Poorooshab (Canada)

Prof. M. Alfaro (Canada)

Prof. S.-L. Shen (China)

Prof. G.-X. Li (China)

Prof. J. Ge (China)

Prof. L. Samang (Indonesia)

Prof. K. Ohgushi (Japan)

Prof. N. Yasufuku (Japan)

Prof. J.-C. Chai (Japan)

Prof. M. Kitazume (Japan)

Prof. M.S.M. Kumar (India)

Prof. H. Hazarika (Japan)

Prof. T. Katsumi (Japan)

Prof. Y. Kawakami (Japan)

Prof. C.-H. Koh (Korea)

Prof. S. Horpibulsuk (Thailand)

Prof. A.J. Metha (USA)

Dr. W. Liengcharernsit (Thailand)

Dr. A. Numata (Japan)

Dr. Y. Nakamura (Japan)

Dr. O.A.C. Hoes (Netherlands)

Dr. S. Karnchanawong (Thailand)

Dr. N.C. Don (Vietnam)

Dr. R. Jia (China)

Preface

The International Symposium on Lowland Technology has been held biennially from 1998 and we reached the 9th meeting at ISLT2014. During the last 18 years, most were held in Saga, Japan. However for this decade it was held in Bangkok, Busan and Bali in 2004, 2008 and 2012, respectively.

When this event was held in attractive cities outside Japan, many participants in the symposium enjoy the atmosphere and ambience of these cities as well as deepen their knowledge on issues involving Lowland. Saga is also still one of typical lowlands in the world, however, touching different features in other lowland areas are also very interesting and informative. Especially, comparing to previous symposium in Bali 2012, that collected 160 papers from 17 countries, the ILMR local organizing committee made great effort for the preparation of the symposium so that we will obtain the result as good as Bali. Finally and fortunately, a total of 130 papers from 11 countries are published in this proceedings.

On average, around 120 papers have been constantly submitted to every past ISLT. It means that many researchers and engineers are interested in lowlands. Furthermore, the term of “lowland” is becoming popular and increasingly has more significant meaning in the era of climate change. Following the same direction, the official journal of IALT, Lowland Technology International, also continues to develop with expanding fields of (i) Geotechnical/Geoenvironmental Engineering, (ii) Water/Environmental Engineering, (iii) City/Urban Planning and Management, (iv) Coastal Science and Engineering and (v) Remedial Measures for Lowland Management.

Those academic publications had played important role in the development of academic disciplines concerning lowlands and thus are essential activities. I hope ISLT2014 in Saga will successfully give fruitful outcome and contribute knowledge to all the participants.



Prof. Hiroyuki Araki
Chairman of Organizing Committee
ISLT 2014 Saga

President's Address

It gives me immense pleasure to welcome all to the 9th International Symposium on Lowland Technology at Saga University, Saga. This symposium follows after the very successful ones at Saga, Busan, Bangkok and Bali. All of us have very fond memories of the very fruitful 8th Symposium in the picturesque resort in Bali. The current one also promises to be equally valuable if not more with more than hundred papers accepted and included for presentation.

ISLT showcases the progress and developments in the field of Lowland and Marine Research with the theme '**Problems and Remedial Measures of Lowlands**' under various topics such as (i) Geotechnical/Geoenvironmental Engineering, (ii) Water/Environmental Engineering, (iii) City/Urban Planning and Management, (iv) Coastal Science and Engineering and (v) Remedial Measures for Lowland Management. More than hundred papers have been received, accepted for publication and presentation. ISLTians can thus look forward to an update on various topics during the Symposium Sept. 29th to Oct. 1st, 2014 in the home grounds of Saga University, the fount for the genesis, nurturing, developing and spreading the knowledge in this area.

It should be noted that nearly twenty five years after the topic is identified for study, ¹² the International Society of Soil Mechanics and Geotechnical Engineering is now proposing to have a new Technical Committee on 'Land Reclamation'. I have always felt that just as humans give birth to life and nurture the baby/infant to life, we at IALT, ILMR and erstwhile ILT have been working diligently to create land and making it functional with all attendant concerns in terms of improving the ground, water, environmental, city/urban planning, coastal and sustainability issues.

While remembering the creators and sustainers of IALT, Prof. Miura, Prof. Poorooshab, Prof. Hayashi, Prof. Kim, etc. we all should compliment the present team of Prof. Araki, Prof. Bergado, Prof. Yamanishi, Prof. Hino, Dr. Azizul, Dr. Suman, Dr. Lam and several others for their untiring efforts to make this Symposium a success. Ms Mariko Yahiro, the ubiquitous worker behind the scenes, is a great asset to all our efforts.

Wishing the Symposium a great success with all your presence and participation and looking forward to meet you,



M R Madhav
President, IALT

List of Reviewers

The Editors would like to thank the following individuals for their assistance in refereeing submitted papers for ISLT 2014

| | |
|--------------------------|-----------------------|
| Prof. H. Araki | Prof. D.T. Bergado |
| Prof. K. Koga | Prof. T. Hino |
| Prof. H. Yamanishi | Prof. J.C. Chai |
| Prof. K. Ohgushi | Prof. F. Ahmad |
| Prof. C.H. Koh | Prof. N. Mishima |
| Prof. M.S. Mohan Kumar | Prof. J. Ge |
| Dr. N. Vongthanasunthorn | Prof. H. Obiya |
| Dr. Y. Mishima | Prof. R. Goto |
| Dr. W. Liengcharernsit | Dr. Y. Taguchi |
| Dr. S. Kamchanawong | Dr. P. Iamtrakul |
| Dr. O.A.C. Hoes | Dr. D. Suetsugu |
| Dr. N.C. Don | Dr. T. Negami |
| Dr. S. Leungprasert | Dr. S. Manandhar |
| Dr. S. Sirivithayapakorn | Dr. L.G. Lam |
| Dr. C. Soralump | Dr. M.A Moqsud |
| Dr. P.I. Rerkrai | Dr. S. Pongsivasathit |
| Dr. T. Inohae | Dr. T. Harianto |
| Dr. T. Nagaie | Dr. R. Jia |
| Dr. T. Kinashi | Dr. J. Saowapakpiboon |
| Dr. W. Daungthima | Dr. T. Tanchaisawat |
| Dr. U. Shummdatayar | Dr. S. Artidteang |

CONTENTS

MIURA LECTURE

| | |
|--|---|
| MIURA LECTURE <i>F.H.M. Van de Ven</i> | 1 |
| WATER AND CLIMATE RESILIENCE OF LOWLAND CITIES <i>F.H.M. Van de Ven</i> | 2 |

KEYNOTE LECTURES

| | |
|---|----|
| WATER QUALITY MODELING FOR WATER MANAGEMENT -INVITATION TO INTEGRAL APPROACH- <i>K. Koga</i> | 5 |
| THE FORMATION OF CONCEPTUAL FRAME AND RESEARCH REVIEW OF ASIAN SUSTAINABLE CITY <i>K. Hokao</i> | 12 |

SPECIAL LECTURES

| | |
|---|----|
| 9 ASSESSMENT OF THE EFFECTS OF SEA-LEVEL CHANGE ON THE GEOENVIRONMENT: THE CASE OF THE ARIAKE SEA COASTAL LOWLANDS <i>T. Hino, J.C. Chai, T. Negami, D.T. Bergado and R. Jia</i> | 21 |
| CHANGES IN SUSPENDED SOLIDS IN THE RESERVOIR OF THE ISAHAYA BAY RECLAMATION PROJECT UNDER THE CONTINUOUS SEAWATER INFLOW <i>N. Vongthanasunthorn, Y. Mitsugi, S. Nagase, P.I. Rerkrai, Y. Mishima, K. Koga, H. Araki and H. Yamanishi</i> | 31 |

PART 1

GEOTECHNICAL AND GEOENVIRONMENTAL ENGINEERING

CHAPTER G1: ANALYTICAL METHODS AND NUMERICAL SIMULATIONS

| | |
|--|----|
| 7 NUMERICAL MODELING INVOLVING BACKFILL GROUTING EFFECTS FOR SEGMENTAL TUNNEL <i>L.G. Lam, H.N. Thi, M. Sugimoto, T. Hino and D.T. Bergado</i> | 37 |
| 8 MODEL TESTING AND NUMERICAL SIMULATIONS OF FLOATING TYPE CEMENT- TREATED COLUMNS DURING CONSOLIDATION SETTLEMENT <i>Z. Jiang, R. Ishikura and N. Yasufuku</i> | 42 |
| 19 NUMERICAL STUDY ON LATERAL MOVEMENT PATTERN OF BEARING REINFORCEMENT EARTH (BRE) WALL <i>C. Suksiripattanapong S. Horpibulsuk, J.C. Chai, S.L. Shen and A. Arulrajah</i> | 50 |
| 10 NON-LINEAR ANALYSIS OF DISPLACEMENTS OF GRANULAR PILE ANCHORS (GPA) IN NORMALLY CONSOLIDATED GROUND <i>B. Vidyaranya and M.R. Madhav</i> | 57 |
| ANALYTICAL SOLUTION TO SOIL FLUSHING THROUGH GEOTEXTILE CONSIDERING CLOGGING <i>H.Y. Wang, X.W. Tang, P.L. Gan and B. Niu</i> | 65 |

| | | |
|----|--|----|
| 12 | ANALYSIS AND SIMULATIONS OF FLOOD CONTROL AND EROSION PROTECTION DESIGNS USING THE PLAXIS 2D AND SLIDE PROGRAMS <i>N. Chanmee, D.T. Bergado, T. Hino and L.G. Lam</i> | 71 |
| | PREDICTION OF SETTLEMENT INDUCED BY MULTI-DIRECTIONAL CYCLIC SHEAR FOCUSED ON PLASTICITY INDEX OF SOFT CLAY <i>Y. Sueyoshi, H. Matsuda, H. Hara, K. Nakahara and T.T. Nhan</i> | 79 |
| 11 | NUMERICAL SIMULATIONS USING FEM 2D COMPARED TO FEM 3D AND OBSERVED BEHAVIOR OF REINFORCED FULL SCALE EMBANKMENT <i>S. Shrestha, P. Baral, D.T. Bergado, J.C. Chai and T. Hino</i> | 85 |

CHAPTER G2: PROPERTIES OF SOILS

| | | |
|----|---|-----|
| 17 | STUDIES ON ENGINEERING PROPERTIES OF LITHOMARGIC CLAYS OF COASTAL KARNATAKA IN INDIA <i>R. Shivashankar, A.U. Ravi Shankar and J. Jayamohan</i> | 93 |
| | DEPOSITIONAL ENVIRONMENT AND GEOTECHNICAL PROPERTIES OF SHANGHAI CLAYS IN COMPARISON WITH ARIAKE AND BANGKOK CLAYS <i>G.L. Ye, C.J. Wu and Y.L. Yu</i> | 101 |
| | EVALUATION OF HYDRAULIC CONDUCTIVITY OF SOFT DEPOSIT BASED ON PIEZOCONE TEST <i>J.P. Wang, S.L. Shen, J.C. Chai and Y.S. Xu</i> | 108 |
| | CHARACTERIZATION OF PEAT IN NORTHERN MANITOBA, CANADA <i>E.M.B. De Guzman and M.C. Alfaro</i> | 113 |
| | CONSOLIDATION BEHAVIOR OF SATURATED MARINE CLAY UNDER CYCLIC LOADING <i>Y. Kuno, A.T. Tran, H. Hara and H. Matsuda</i> | 120 |
| | ANISOTROPIC CONSOLIDATION BEHAVIOR AND MICROSTRUCTURE OF ARIAKE CLAY <i>K. Aiga, J.C. Chai and T. Negami</i> | 125 |
| 9 | THE POST-DEPOSITIONAL ENVIRONMENTAL CHANGES OF ARIAKE CLAY IN SAGA PLAIN <i>R. Jia and T. Hino</i> | 131 |
| | CYCLIC BEHAVIOR OF MARINE SILTY SAND SUBJECTED TO LONG TERM LOADING <i>J.M. Kim, S.W. Son, T.K. Ryu, S.H. Park and G. Soriano</i> | 137 |

CHAPTER G3A: SOIL/GROUND IMPROVEMENT A

| | | |
|----|---|-----|
| | STRENGTH INCREASE OF SOFT CLAY UNDER EMBANKMENT LOADING IN YUHUAN, CHINA <i>H.N. Wu, Y. Yuan, S.L. Shen and Y.S. Xu</i> | 144 |
| 15 | LABORATORY TESTS ON THE INFLUENCE OF SOIL DISTURBANCE ON THE MATERIAL PROPERTIES OF CEMENT-TREATED SOIL <i>M. Makino, T. Takeyama and M. Kitazume</i> | 150 |
| 15 | LABORATORY MODEL TESTS OF THE EFFECT OF DECREASE IN PERMEABILITY OF VERTICAL DRAIN ON CONSOLIDATION BEHAVIOR <i>T. Tsuyoshi, T. Takeyama and M. Kitazume</i> | 156 |

| | |
|--|-----|
| CENTRIFUGE MODEL TESTS ON EMBANKMENT ON SOFT CLAY GROUND SUBJECTED TO DREDGED SOIL PRESSURE <i>Y. Otake, T. Takeyama and M. Kitazume</i> | 163 |
| PROGRESS SPEED OF DETERIORATION OF CEMENT AND LIME TREATED SOIL IMMERSSED IN SEAWATER <i>H. Hara, D. Suetsugu and H. Matsuda</i> | 169 |
| 8 UTILIZATION OF SUGARCANE BAGASSE ASH IN PEAT STABILIZATION <i>M.K. Abu Talib, N. Yasufuku and R. Ishikura</i> | 174 |
| 8 SHORT TERM DURABILITY OF CEMENT STABILIZED SANDY SOIL UNDER SEAWATER ENVIRONMENT <i>R. Ishikura, N. Yasufuku, T. Kono and R. Kurokawa</i> | 181 |

CHAPTER G3B: SOIL/GROUND IMPROVEMENT B

| | |
|---|-----|
| NUMERICAL STUDY ON DYNAMIC BEHAVIOR OF COLUMNAR VERSUS LATTICE-SHAPED GROUND IMPROVEMENT <i>S.S. Lin, C. J. Chien, C.C. Yang and H.C. Lai</i> | 188 |
| 19 COMPRESSIVE STRENGTH DEVELOPMENT OF CLAY-FLY ASH GEOPOLYMER <i>P. Sukmak, S. Horpibulsuk and C. Suksiripattanapong</i> | 196 |
| A STUDY ON THE EFFECT OF SALT ON THE BEHAVIOUR OF COMPACTED BENTONITE <i>A.K. Mishra and J. Dutta</i> | 205 |
| SWELLING CHARACTERISTICS OF EXPANSIVE SOILS IMPROVED WITH CEMENT AND FLY ASH <i>P. Voottipruex, P. Jamsawang, S. Kamkootod and S. Intapichai</i> | 211 |
| 4 SOIL CEMENT MIX DESIGN TEST FOR URGENT DISASTER REDUCTION OF MT. BAWAKARAENG, INDONESIA <i>T. Harianto, S.H. Nur, I. Maricar, A.A. Amiruddin and Masriflin</i> | 218 |
| AN OVERVIEW ON THE FACTORS INFLUENCING THE COMPRESSIBILITY CHARACTERISTIC OF CEMENT-BENTONITE MIXTURE SLURRY SAMPLES <i>M. A. Walenna, and L. Samang</i> | 224 |
| MODEL TEST OF THE TIMBER RAFT AND PILES COMPOSITE FOUNDATION COMBINED WITH THE VERTICAL DRAIN <i>J. Sasaki, D. Suetsugu and S. Manandhar</i> | 231 |

CHAPTER G3C: SOIL/GROUND IMPROVEMENT C

| | |
|--|-----|
| 19 A NOVEL GREEN CONSTRUCTION MATERIAL FROM WATER TREATMENT SLUDGE <i>S. Horpibulsuk, C. Suksiripattanapong, P. Chanprasert, P. Sukmak and A. Arulrajah</i> | 235 |
| EFFECTS OF GROUND IMPROVEMENT ON LOW ALKALINE STABILIZER WITH RECYCLED PLASTER <i>S. Sugimoto, K. Omine and Y. Jiang</i> | 240 |
| 6 FEASIBILITY OF STEEL SLAG-FLY ASH-DOLIME MIX AS A BASE COURSE MATERIAL FOR FLEXIBLE PAVEMENTS <i>S. Patel, J.T. Shahu and T.R. Naik</i> | 245 |

| | |
|---|-----|
| EVALUATION OF LIGHTWEIGHT DEFLECTOMETER TESTS ON THIN SURFACE PAVEMENT BY USING MULTI-LAYER LINEAR ELASTIC ANALYSIS <i>T. Posribink, S. Youwai and W. Kongkitkul</i> | 254 |
|---|-----|

| | |
|---|-----|
| THE EFFECT OF ENVIRONMENT CHANGE ON THE STRENGTH OF CEMENT TREATED GROUND AND ITS ADJACENT GROUND <i>T. Himeno, T. Negami, R. Jia and T.Hino</i> | 262 |
|---|-----|

| | |
|---|-----|
| THE EFFECT OF WATER CONTENT REDUCTION TO FIBROUS PEAT ABSORBENT CAPACITY AND ITS BEHAVIOUR <i>F.E. Yulianto, F. Harwadi and M.K. Wardani</i> | 266 |
|---|-----|

| | |
|---|-----|
| PERFORMANCE OF WASTE QUARRY BY-PRODUCTS AS A SUPPLEMENTARY RECYCLED SUBGRADE MATERIAL <i>S. Manandhar, D. Suetsugu, H. Hara and H. Hayashi</i> | 271 |
|---|-----|

CHAPTER G3D: SOIL/GROUND IMPROVEMENT D

| | |
|--|-----|
| STRENGTH RESPONSE OF FLY ASH MIXED WITH PLASTIC WASTE UNDER STATIC AND DYNAMIC LOADING <i>G.L. Sivakumar Babu and R. Pratibha</i> | 279 |
|--|-----|

| | |
|---|-----|
| METHODOLGY FOR CALCULATING THE CONSOLIDATION SETTLEMENT OF FLOATING SOIL-CEMENT COLUMN IMPROVED SOFT CLAYEY DEPOSIT <i>S. Pongsivasathit, P. Jitsuwan, J.C. Chai and T. Hino</i> | 285 |
|---|-----|

| | |
|---|-----|
| RUZI GRASS COMBINED WITH WATER HYACINTH WOVEN LIMITED LIFE GEOTEXTILES (LLGS) FOR SOIL EROSION CONTROL <i>S. Artideang., D.T. Bergado, S. Chaiyaput and L.G. Lam</i> | 294 |
|---|-----|

| | |
|--|-----|
| APPLICATION OF 8R MAT FOR SLOPE PROTECTION AND SOIL EROSION CONTROL <i>F. Ahmad</i> | 300 |
|--|-----|

| | |
|---|-----|
| STUDY OF QUARTZ MINERAL BASED ON SMEAR SLIDES IN BILI BILI DAM OF PARANGLOE, GOWA DISTRICT OF SOUTH SULAWESI PROVINCE <i>H. Hamrullah, I. Alimuddin, H. Umar and H. Pachri</i> | 308 |
|---|-----|

| | |
|---|-----|
| PERFORMANCE OF PVDS IMPROVEMENT WITH AND WITHOUT VACUUM FOR SOFT GROUND <i>L.G. Lam, D.T. Bergado, P. Voottipruex, J. Saowapakpiboon and T. Hino</i> | 313 |
|---|-----|

| | |
|--|-----|
| CHARACTERISTICS OF WET-DRY CYCLES OF COMPACTED EXPANSIVE SOIL-FIBER MIXTURE <i>S.H. Nur, T. Harianto and A. Cakra</i> | 318 |
|--|-----|

CHAPTER G4: SOIL REINFORCEMENT/GEOSYNTHETICS

| | |
|--|-----|
| PERFORMANCES OF GEOSYNTHETIC REINFORCEMENT ON THE BALLASTED RAILWAY TRACK-MODEL TEST <i>L.S. Sowmiya, J.T. Shahu and K.K. Gupta</i> | 326 |
|--|-----|

| | |
|--|-----|
| GEOSYNTHETIC REINFORCED STONE COLUMNS IN SOFT SOILS: AN EXPERIMENTAL AND ANALYTICAL STUDY <i>K. Ali, J.T. Shahu and K.G. Sharma</i> | 332 |
|--|-----|

| | |
|---|-----|
| ANALYSIS OF OBLIQUE PULL IN REINFORCED SOIL WALL – COHERENT GRAVITY AND TIEBACK WEDGE METHODS <i>P.V.S.N.P. Kumar, M. R. Madhav and M. Kumar</i> | 340 |
|---|-----|

| | | |
|----------|--|-----|
| 6 | A NEW ANALYSIS OF REINFORCED SOIL WALL RESTING ON SOFT GROUND | |
| | <i>S. Patra and J.T. Shahu</i> | 348 |
| | FURTHER MODIFICATION K-STIFFNESS METHOD ON SOFT AND HARD FOUNDATIONS | |
| | <i>S. Duangkhae, D.T. Bergado, J.C. Chai and T. Hino</i> | 353 |
| 4 | CASE STUDY OF REINFORCED UNSTABLE SLOPE IN SOFT CLAY USING MICROPILE | |
| | <i>A. Arsyad, L. Samang T. Harianto, Ahmad and O. Tenta</i> | 361 |
| | ROOT STRENGTH OF VETIVER AND RUZI GRASSES FROM IN-SITU TESTS | |
| | <i>J. Maneecharoen, W. Hwte, D.T. Bergado, T. Hino and N.T.N. Truc</i> | 367 |

CHAPTER G5: FOUNDATIONS ON IMPROVED SOILS

| | | |
|-----------|---|-----|
| | EXPERIMENTAL STUDY OF SANDY CLAY REINFORCED BY GROUTED SAND COLUMN | |
| | <i>L. Samang, A.B. Muhiddin, A. Arsyad, R. Abdullah and N. Dhani</i> | 373 |
| 10 | KINEMATICS AND BEARING CAPACITY OF STRIP FOOTING ON REINFORCED GRANULAR BED OVER SOFT GROUND STABILIZED WITH GRANULAR TRENCH | |
| | <i>R. Kurapati, S.V. Abhishek and M.R. Madhav</i> | 377 |
| | APPROPRIATENESS OF PILED RAFT FOUNDATION FOR TALL STACK-LIKE STRUCTURES IN COASTAL AREAS | |
| | <i>B.R. Jayalekshmi, S.V. Jisha and R. Shivashankar</i> | 385 |
| 6 | PERFORMANCE OF STONE COLUMN REINFORCED SOFT CLAY UNDER CYCLIC AND STATIC LOADING | |
| | <i>S. Kumar and J.T. Shahu</i> | 393 |
| | CONSIDERATION OF INDUCED OVERCONSOLIDATION ON RESPONSE OF GRANULAR PILE REINFORCED SOFT GROUND | |
| | <i>K. Suresh, M.R. Madhav and E.C. Nirmala Peter</i> | 397 |
| | FULL-SCALE TRIAL EMBANKMENT ON SOFT SOIL REINFORCED WITH INCLINED PILE | |
| | <i>Suheriyatna, L. Samang, M.W. Tjaronge and T. Harianto</i> | 404 |
| | A FULL SCALE EXPERIMENTAL STUDY OF PILE-PVD (HYBRID PILE) REINFORCEMENT OVER SOFT SOIL | |
| | <i>Y. Sandyutama, L. Samang, A.M. Imran and T. Harianto</i> | 410 |

CHAPTER G6: SOIL GEOHAZARD AND GEOENVIRONMENT IN LOWLANDS

| | | |
|--|---|-----|
| | MITIGATIONS OF MULTI-HAZARDS IN LOWER CHAO PHYA RIVER BASIN, THAILAND | |
| | <i>S. Soralump</i> | 416 |
| | DEWATERING EFFECT ON SURROUNDINGS DURING DEEP EXCAVATION IN SOFT DEPOSIT OF TIANJIN, CHINA | |
| | <i>Y.X. Wu, S.L. Shen and Y.S. Xu</i> | 423 |
| | GEO TECHNICAL CHARACTERIZATION OF THE SUBSOIL PROFILE UNDERLYING THE LAND SUBSIDENCE MONITORING POINTS IN SOUTHERN VIETNAM DELTA | |
| | <i>P.H. Giao, T.T. Thoang, L.X. Thuyen and N.N.N. Vu</i> | 429 |
| | SYSTEM FOR MONITORING ADAPTATION TO CLIMATE CHANGE-INDUCED DISASTERS IN COASTAL REGIONS | |
| | <i>K. Yasuhara, K. Kuwahara and D.M. Duc</i> | 437 |

| | |
|---|-----|
| SEDIMENT ACCUMULATION IN THE KULEKHANI RESERVOIR DUE TO THE 1993 DEBRIS FLOWS AND LANDSLIDES <i>M.R. Dhital, S. Manandhar, T. Hino and D. Suetsugu</i> | 443 |
| 4 COASTAL EROSION IN TAKALAR BEACH SOUTHERN MAKASSAR, INDONESIA <i>R. Langkoke, B. Rochmanto, J.R. Husain and M. Akbar</i> | 451 |
| EFFECTS OF ACID TREATMENT AGENT AND SALINITY ON TRANSPARENCY OF THE ARIAKE SEA <i>K. Tsukamoto, D. Suetsugu, S. Manandhar and H. Hara</i> | 461 |
| CONCURRENT BIOELECTRICITY AND GEOENVIRONMENTAL IMPROVEMENT OF ACID VOLATILE SULFIDE SEDIMENT <i>M.A. Moqsud, Y. Kanehagi and M. Hyodo</i> | 466 |

PART 2
WATER AND ENVIRONMENTAL ENGINEERING
COASTAL ENGINEERING

CHAPTER W1: GROUNDWATER AND SOIL CONTAMINATION MANAGEMENT

| | |
|--|-----|
| MODELING OF SEAWATER INTRUSION REDUCED IN UNCONFINED AQUIFER WITH PHYSICAL BARRIER <i>Nurnawaty, M. Selintung, A. Thaha and F. Maricar</i> | 471 |
| MODELING THE EFFECT OF LEAKY SEWER ON GROUNDWATER MICROBIAL QUALITY <i>N. Seetha, G.R. Anjana and M.S. Mohan Kumar</i> | 476 |
| APPLICATION OF ASTAR AND RBF-NN TO PREDICT LOCATION AND MAGNITUDE OF PIPE LEAK ON WATER DISTRIBUTION NETWORK <i>A.E.U. Salam, M. Tola, M. Selintung and F. Maricar</i> | 481 |
| 5 THE INFLUENCE OF GIVING LIME AND FERTILIZER TO THE WATER QUALITY OF THE ACID-SULPHATE AGRICULTURE LAND MODEL <i>A. Rusdiansyah, N. Helda and Rismawidha</i> | 487 |
| 1 BIOREMEDIATION OF SOIL CONTAMINATED WITH RESIDUAL FUEL OIL BY NITRATE ADDITION <i>S. Leungprasert and M. Suknij</i> | 492 |
| 3 GIS-BASED STATISTICAL ANALYSES OF DIRECT SURFACE WATER-GROUNDWATER CORRELATIONS IN THAILAND <i>A. Putthividhya, S. Jirasirilak, A. Amto and S. Petra</i> | 496 |
| NUMERICAL MODEL OF AN AQUIFER THERMAL ENERGY STORAGE SYSTEM WITH MULTIPLE WELLS <i>S. Ganguly and M. S. Mohan Kumar</i> | 504 |

CHAPTER W2: WASTEWATER AND WASTE MANAGEMENT

| | |
|--|-----|
| FIELD INVESTIGATION ON THE DECENTRALIZED WASTEWATER TREATMENT PLANTS CONSTRUCTED TO IMPROVE SANITATION CONDITION IN KHULNA <i>S. R. Saha and M. Alamgir</i> | 510 |
|--|-----|

| | |
|---|-----|
| THE BENEFITS OF PADDY HUSK BRIQUETTES AS ABSORBER IN THE DISTILLATION PROCESS <i>H.U. Syarif, D.A. Suriamiharja, M. Selintung and A.W. Wahab</i> | 518 |
| 1 THE INVESTIGATION OF CATIONIC DYE ADSORPTION ON THERMAL AND CHEMICAL ACTIVATED ADSORBENTS FROM WATER SUPPLY SLUDGE AND ASHES FROM BIOMASS POWER PLANT <i>S. Polruang, P. Banjerdki and S. Sirivithayapakorn</i> | 523 |
| 2 SYNTHESIS OF HYBRID ADSORBENT CONTAINING NANO-SIZE HYDROTALCITE AND ZEOLITE AND BASIC PERFORMANCE <i>M. Ohno, Y. Kobayashi, H. Sahara, S. Juengjarernnirathorn, Y. Mishima and H. Araki</i> | 530 |
| 2 EVALUATION ON APPLICABILITY OF A NEW HYBRID ADSORBENT TO WATER POLLUTION CONTROL IN LOWLAND BY COMPLEX LEACHATE FROM WASTE LANDFILL SITE <i>S. Juengjarernnirathorn, M. Ohno, Y. Mishima, H. Sahara and H. Araki</i> | 536 |
| 1 EFFECTS OF METAL LOADING ON THE PHOTOCATALYTIC NITRATE REDUCTION EFFICIENCIES OF TiO ₂ CATALYST <i>K. Kobwittaya and S. Sirivithayapakorn</i> | 543 |
| 1 BIOGAS PRODUCTION FROM CO-DIGESTION OF MUNICIPAL WASTEWATER AND FOOD WASTE IN BANGKOK, THAILAND <i>P. Banjerdki, S. Polruang and S. Sirivithayapakorn</i> | 548 |

CHAPTER W3: FLOOD ANALYSIS AND MANAGEMENT

| | |
|---|-----|
| ONLINE ESTIMATION OF FLOOD DAMAGE IN THE NETHERLANDS <i>O.A.C. Hoes, M.A.U.R. Tariq and N.C. Van de Giesen</i> | 553 |
| A STUDY ON RIVER BASIN MANAGEMENT IN JOBARU RIVER BASIN BY COMPUTATIONAL SIMULATIONS OF FLOOD AND SEDIMENT TRANSPORT AND FIELD GEOTECHNICAL INVESTIGATIONS <i>H. Nakashima, K. Ohgushi, T. Hino, T. Morita and T. Jansen</i> | 559 |
| EVACUATION AND FLOOD SIMULATIONS IN THE CASE THAT SHELTERS ARE INCLUDED IN LOWLAND AREA <i>T. Morita, K. Ohgushi and A.H. Thambas</i> | 566 |
| DEVELOPMENT OF FLOOD ROUTING MODELS FOR YOM RIVER BASIN <i>W. Liengcharensit, R. Charoensuk, P. Siripanaroj and P. Ruekrai</i> | 572 |
| PERCEPTION OF FLOOD-PRONE COMMUNITIES IN PROBLEMATIC OF FLOOD RESPONSE: CASE STUDIES IN BANGKOK AND NONTABURI PROVINCE <i>I. Raungratanaamporn</i> | 578 |
| ALTERNATIVE SOLUTIONS OF FLOOD AND WASTE MANAGEMENT IN MANADO, "ECO-TOURISM" CITY <i>A.K.T. Dundu, K. Ohgushi and R.J.M. Mandagi</i> | 586 |

CHAPTER W4: PROBLEM ANALYSIS IN RIVER BASIN AND COASTAL AREA

| | |
|--|-----|
| 3 CHANGE DETECTION OF VEGETATION USING LANDSAT IMAGERY IN MODIFIED AJKWA DEPOSITION AREA (MOD-ADA) AT FREEPORT INDONESIA LTD IN PAPUA 3 DONESIA <i>Y. Windusari and S.P. Sari</i> | 593 |
|--|-----|

| | |
|---|-----|
| COMPARISON OF METHODS OF EXTRACTION OF WATER BODIES FROM META DATA <i>N. Nawaz , S. Sanaga and P.K. Rao</i> | 597 |
| SCOUR REDUCER MODELING BY USING CURTAIN RECTANGULAR WITH WEDGE CURVE SHAPE (RWWSC) AT PILLAR ZONA <i>Nenny, S. Pallu , A. Thaha and F. Maricar</i> | 601 |
| ASSESSING WADEABLE STREAMBANK STABILITY OF THE KODKU RIVER, KATHMANDU USING MORPHO-HYDROLOGIC PARAMETERS AND BANK EROSION POTENTIAL <i>N.K. Tamrakar, R. Bajracharya, and S. Manandhar</i> | 609 |
| COASTAL VULNERABILITY BASED ON TECTONICS AND SHORELINE CHANGE ALONG COASTAL AREA OF LUMPUE COAST SOUTH SULAWESI <i>H. Sirajuddin, D.A. Suriamihardja, A.M. Imran, and M.A. Thaha</i> | 617 |

CHAPTER W5: WATER RESOURCES AND WATER ENVIRONMENT

| | |
|--|-----|
| POTENTIAL CONTRIBUTION OF HYDRO POWER PLANTS TO THE ENERGY CONSUMPTION OF EAST ASIAN ISLANDS <i>O.A.C. Hoes, L.J.J. Meijer, D.R. Sarfianto and R.J. Van der Endt</i> | 622 |
| IDENTIFICATION STUDY ON WATER MANAGEMENT SYSTEM IN LIANG POLDER, BANJAR REGENCY, SOUTH KALIMANTAN PROVINCE <i>N. Fithria, N. Helda and N. Amal</i> | 628 |
| WATER RESOURCES GOVERNANCE BASED ON AN INTEGRATED LAKE BASIN MANAGEMENT APPROACH <i>S. Silva, A. Bernal, M. Ortíz and G. Cuevas</i> | 637 |
| PREDOMINANT ALGAE IN BANG PHRA RESERVOIR: MORPHOLOGICAL AND MOLECULAR IDENTIFICATION <i>P. Suwanvitaya and S. Suwan</i> | 646 |
| LONG-TERM CHANGE OF SUSPENDED SOLIDS IN THE INNERMOST PART OF THE ARIAKE SEA <i>S. Nagase, N. Vongthanasunthorn , Y. Mishima, H. Araki and K. Koga</i> | 652 |
| THE STUDY OF CHAETOCEROS BLOOMING AND WATER QUALITY MONITORING IN CHONBURI BAY <i>P.I. Rerkrai and W. Liengcharernsit</i> | 658 |
| INFLUENCE OF ARTIFICIAL TRENCHES ON HABITAT IN A TIDAL AREA <i>Y. Nagahama, K. Nishimura, A. Kitsuka and H. Yamanishi</i> | 664 |
| THE RELATIONSHIP OF PHYSICAL ENVIRONMENT AND HYDRAULIC CONDITIONS ON FISH FAUNA <i>R. Lopa and Y. Shimatani</i> | 670 |

**PART 3
CITY/URBAN PLANNING AND MANAGEMENT**

CHAPTER U1: SUSTAINABILITY

| | |
|---|-----|
| DEVELOPMENT OF CRIME RISK ASSESSMENT FOR COMMUNITY SAFETY DESIGN <i>M. Kinashi</i> | 677 |
|---|-----|

| | |
|---|-----|
| MULTIVARIABLE CLASSIFICATION OF MORPHOLOGY VULNERABILITY TYPES AND CHARACTERISTICS ON CULTURAL HERITAGE IN AYUTTHAYA, THAILAND <i>W. Daungthima and K. Hokao</i> | 685 |
| MANAGING RISK IN THE ROAD MAINTENANCE WORK: A CASE STUDY OF PERFORMANCE BASED CONTRACT <i>B. Mochtar, H. Parung, J. Patanduk and N. Ali</i> | 691 |
| RISK STUDY IN IMPLEMENTATION FRAMEWORK AGREEMENT CONSTRUCTION IN EAST KALIMANTAN: REVIEW OF THE PROJECT CYCLE <i>Habir, H. Parung, M. R. Rahim and M. Amri</i> | 697 |
| RISK ALLOCATION MODEL ON PUBLIC PRIVATE PARTNERSHIP (PPP) AIRPORT INFRASTRUCTURE DEVELOPMENT IN INDONESIA <i>R.U. Latief, S. Pallu, S.A. Adisasmita and S.H. Aly</i> | 705 |
| EXPLORE THE IMPACT OF SEA LEVEL RISE ON URBAN TRANSPORT PROJECTS <i>S. Zhou and W. Li</i> | 714 |

CHAPTER U2: COMMUNITY PLANNING

| | |
|--|-----|
| REVISITING THE GARDEN CITY CONCEPT TO DESIGN THE SUSTAINABLE CITIES OF THE 21 ST CENTURY: THE CASE OF PUTRAJAYA CITY, MALAYSIA <i>S.A. Silva and M.A. Ortiz</i> | 719 |
| NEIGHBORHOOD CHARACTERISTICS OF AN ETHNIC BANTIK COMMUNITY IN INDONESIA <i>P.P. Egam, N. Mishima, R. Goto and Y. Taguchi</i> | 725 |
| AN ANALYSIS ON CURRENT QUALITY OF LIFE IN AN OLD TOWN WATER DISTRICT: VIEWING IN A CASE OF KHLONG BANG LUANG FROM COMMUNITY CONDITION AND WATER CONDITION <i>T. Tanachawengsakul and N. Mishima</i> | 734 |
| THE SELF-ORGANIZATION SYSTEM OF LOW-INCOME INDIVIDUAL INTEGRATION INTO LOWLAND CONDITIONS <i>U. Shummadtayarand K. Hokao</i> | 743 |
| STUDY ON METHODOLOGY OF THE ASSESSMENT OF URBAN RESIDENTIAL ACOUSTIC ENVIRONMENT <i>M. Zhu</i> | 751 |
| RENOVATION AND SUSTAINABLE DEVELOPMENT OF THE RURAL HOUSES: TAKING THE LONGHOUSE'S RENOVATION IN ZHANG LUWAN VILLAGE OF CHINA AS EXAMPLE <i>C. Chen, Z. Wang and L. Wang</i> | 755 |

CHAPTER U3: PLANNING

| | |
|---|-----|
| MOVING FORWARD TO WALKABILITY OF TRANSIT ORIENTED DEVELOPMENT (TOD): A CASE STUDY OF BANGKOK METROPOLITAN, THAILAND <i>P. Iamtrakul and Kritayanukul</i> | 760 |
| USE BALANCED SCORECARD FOR MEASURING COMPETITIVE ADVANTAGE OF INFRASTRUCTURE ASSETS OF STATE-OWNED PORTS IN INDONESIA: PELINDO IV, MAKASSAR BRANCH <i>N. Hamid</i> | 766 |

| | |
|--|-----|
| THE IMPACT OF URBAN SPRAWL ON CULTIVATED AREA IN RIVER CITY OF CHIANG MAI <i>N. Srinurak and N. Mishima</i> | 774 |
| AN URBAN ECOLOGICAL CLASSIFICATION SYSTEM FOR PLANNING DECISION MAKING IN BANGKOK <i>S. Siewwuttanagul, M. Srivanit, P. Iamtrakul and H. Li</i> | 781 |
| CONTINUATION AND RECONSTRUCTION STRATEGY OF “TOWN VILLAGE”- A CASE STUDY OF ZHONG CUN VILLAGE PLANNING <i>J. W. Yan, Z. Wang and L. Wang</i> | 789 |
| STUDY ON THE STRATEGY OF RURAL DESIGN AND PLANNING OF ZHEJIANG PROVINCE BASED ON THE LANDSCAPE CHANGE DRIVING FORCE RESEARCH <i>H. Shen and Z. Wang</i> | 796 |

CHAPTER U4: CULTURE HERITAGE

| | |
|---|-----|
| CARBON FOOTPRINT FOR ENGINEERING DEPARTMENT, KASETSART UNIVERSITY, COMPARISON BETWEEN NORMAL YEARS AND 2011 WITH THAILAND FLOOD <i>C. Soralump</i> | 801 |
| RESEARCH OF UPDATED STRATEGIES ON OLD COMMUNITIES LOCATED IN CITY CENTER AREA: A CASE STUDY OF ZHU ZI FANG COMMUNITY IN FUZHOU, FUJIAN <i>Y. Zheng and Z. Wang</i> | 806 |
| STRATEGY OF COASTLINE LANDSCAPE DESIGN TO COPE WITH THE RISING SEA LEVELS <i>Y. Ma</i> | 810 |
| COASTAL AND WATERFRONT PLANNING STRATEGIES BASED ON THE SEA-LEVEL RISE <i>Y. Yang</i> | 813 |
| MICROSTRUCTURE CHARACTERISTIC AND COMPRESSIVE STRENGTH OF SELF COMPACTING CONCRETE USING SEAWATER AS MIXING WATER <i>Erniati, M.W. Tjaronge, R. Djamaluddin and V. Sampebulu</i> | 817 |
| EFFECT OF GFRP BELT TO THE FAILURE MODE OF CRACKED CONCRETE BEAMS STRENGTHENED USING GFRP SHEET <i>R. Djamaluddin and A.M. Akkas</i> | 823 |
| Authors' Index | 829 |

5
**THE INFLUENCE OF GIVING LIME AND FERTILIZER TO THE WATER QUALITY
OF THE ACID-SULPHATE AGRICULTURE LAND MODEL**

A. Rusdiansyah¹, N. Helda² and Rismawidha³

ABSTRACT: Low pH and pyrite layer are the most frequent problems found in the acid sulphate land. It can be found in many lowland regions in South Kalimantan Province i.e Barito Kuala Regency. The value of pH, iron (Fe) and sulphate (SO₄)²⁻ concentration for the case study in Barito Kuala Regency were about 4.00, 8.40 mg/l and 2100.00 mg/l respectively. This study is done to learn more about the influence of pH, Fe and sulphate concentration before and after conducting amelioration treatment and which will be the best dosage for lowering the acidity of acid sulphate land. The research was done in the green house with the agriculture land model using acid sulphate soil. There were some variations of lime dosages i.e. 24 gram, 36 gram, 48 gram, 60 gram and 72 gram, respectively. One box was left without any treatment as a control. Fertilizing dosages were 6.00 gram of Urea, 3.24 gram of SP36 and 2.40 gram of KCl. The water height was maintained 5 cm above the soil surface. From the result, it was indicated that by giving lime (as ameliorant), it can improve the water quality significantly. The pH values changed from 4.00 to 5.50. Fe concentration has decreased from 8.40 mg/l to 0.64 mg/l. Sulphate concentration also has decreased from 2100.00 mg/l to 1401.00 mg/l. From Duncan Multiple Range Test (DMRT), it was determined that by giving 48 gram of ameliorant can improve water quality significantly.

Keywords: pH, iron (Fe), sulphate, acid-sulphate agriculture land

INTRODUCTION

Recently, the agriculture land in Barito Kuala Regency, South Kalimantan Province, has been decreased continuously and it influenced the food productivity. Many efforts have to done to solve the problem, such as the optimum use of acid-sulphate agriculture land (Khairullah et al. 2011). Frequently, the problems found in acid-sulphate agriculture land are low pH, pyrite layer existence and minimum mineral element l11s. The occurrence of pyrite oxidation will produce H⁺ ion and SO₄²⁻ ion which will increase the iron (Fe²⁺) solubility. In stagnant condition, the acidity of soil can be lessened, however the iron (Fe²⁺) poisoned occurs; and also Al, Mn, H₂S, CO₂ and organic acids poisoned (Suriadikarta dan Setyorin 2006 in DEPTAN 2006). The iron poisoned can be prevented by managing soil and water by using variety of plants and fertilizer and also amelioration treatment (Khairullah et al. 2011).

In Barito Kuala Regency, South Kalimantan Province, to protect plants from iron poisoned, the farmers use

lime and also fertilizer to increase the soil mineral elements. The amelioration treatment has to be conducted before giving fertilizer to the plants. Giving fertilizer before amelioration treatment will not effective and end with no significant result (Balai Besar Penelitian dan Pengembangan Sumberdaya Lahan Pertanian 2006).

Dolomite is used extensively for acid sulphate land. It consists of 40% Calcium Oxide and 18-22% Magnesium Oxide. Not only to increase the pH values, Lime is also used as the soil buffer so that the acidity is in stable condition (Lingga dan Marsono 2007). The dosage of giving fertilizer should correspond to the soil minerals status. The dolomite dosage of 1000-3000 kg/ha is recommended for fertilizing acid-sulphate land (Masganti 2009). Urea fertilizer of 250 kg/ha is distributed for 3 times as follows: (i) planting time, (ii) 4 weeks after planting time and (iii) 7 weeks after planting time. SP36 of 135 kg/ha and KCl of 100 kg/ha are all given at planting time (Suastika et al.; Badan Penelitian dan Pengembangan Pertanian 1997).

¹ Lecturer at Civil Engineering Dept., Engineering Faculty, Lambung Mangkurat University, South Kalimantan Province, INDONESIA. Achmadrusdiansyah@gmail.com

² IALT Member, Lecturer at Civil Engineering Dept., Engineering Faculty, Lambung Mangkurat University, South Kalimantan Province, INDONESIA, noordiah_helda@yahoo.com

³ S.T., Bachelor in Environmental Engineering, Environmental Engineering Department, Engineering Faculty, Lambung Mangkurat University, South Kalimantan Province, INDONESIA

The dosage of lime for every meter of the land can be calculated as follows:

$$\text{dosage} = \frac{\text{limed dosage}}{10000\text{m}^2} \quad (1)$$

For Indonesian condition, fertilizing application is recommended to be given at the same time (constant time). The first fertilizing is given 14 days before planting, the second is 23-28 days after planting and the third is 38-42 days after planting respectively (DEPTAN 2007).

OBJECTIVES

The study was conducted in order to:

- (a) To identify the influence of water quality parameters (pH, Fe and sulphate concentration) before and after conducting amelioration treatment.
- (b) To determine the best dosage for lowering the acidity of acid sulphate land.

METHODOLOGY

Location and Time of Study

The study was conducted in laboratory scale, in green house of Lambung Mangkurat University with the agriculture land model using acid sulphate soil. The study was carried out during May – September 2012. The soil and water sample were taken from Puntik Tengah Village, Barito Kuala Regency, South Kalimantan Province, Indonesia.

Methods of Study

The study was carried out with the agriculture land model using acid sulphate soil. There were some variations of lime dosages i.e. 24 gram, 36 gram, 48 gram, 60 gram and 72 gram, respectively. One box was left without any treatment as a control. Fertilizing dosages were 6.00 gram of Urea, 3.24 gram of SP36 and 2.40 gram of KCl. The water height was maintained 5 cm above the soil surface.

Amelioration treatment was done two (2) weeks before planting and fertilizing treatment was conducted by following the constant time method. The first fertilizing is given 0 days before planting, the second is 28 days after planting and the third is 42 days after planting respectively. The first fertilizing used one third of Urea and all SP36 and KCl. The second and the third fertilizing used the rest of Urea. Water sample was taken before fertilizing.

Data Analyses used to identify the influence of amelioration and fertilizing treatment was a complete random design (RAL= Rancangan Acak Lengkap faktorial). Then, it is followed by Duncan Multiple Range Test (DMRT).

RESULTS AND DISCUSSIONS

Amelioration treatment especially giving lime and fertilizing can improve the water quality of acil-sulphate agriculture land. The changes of water quality parameters (pH, Fe and sulphate concentration) are presented in the following graphs (Figs. 1, 2, 3 and 4).

Based on Fig. 1, it can be concluded that the higher the lime and fertilizer dosages given, the higher the pH

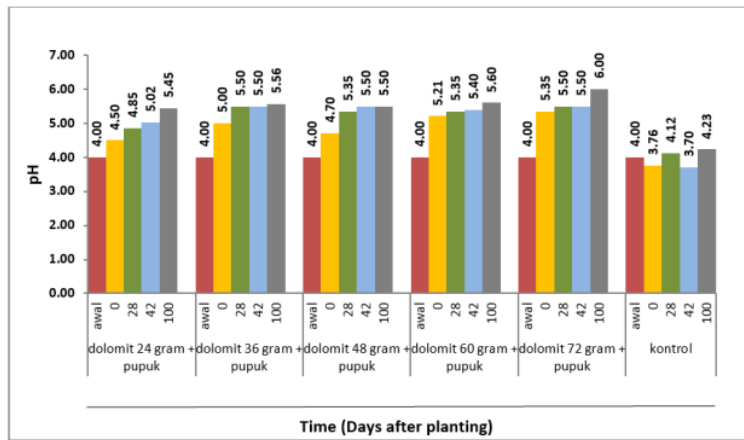


Fig. 1 The water quality changes for pH

values. The pH values range from 4.5 to 5.35. This result shows that the water sample after treatment becomes good and can be used for agriculture land.

Dolomite is known to be an agent to rise the pH values because of its base characteristics and capable of neutralizing poisoned ion such as SO_4^{2-} . The pH values after fertilizing treatment show no significant increase. The base characteristics of Urea were not give big influence to raise the pH values. Therefore, amelioration treatment should be done to improve the quality of the soil.

Stagnant condition resulted high pH caused by H^+ ion consumption by Al, formed molecule of $\text{Al}(\text{OH})_3$, then AlPO_4 released P. The higher values of pH were also caused by OH^- ion was released resulted from the changes of Fe^{2+} to Fe^{3+} . The changes of Fe concentration is presented in Fig. 2 below.

As shown in Fig. 2, it can be explained that after amelioration treatment for 100 days after planting, the Fe concentration ranges from 0.52 – 0.31 mg/l. This result indicates that the treatment with some stages capable of improving the water quality, so that iron poisoned could be prevented.

The decrease of Fe concentration has correlation with the decrease of Fe solubility caused by the raise of pH values. The next Fig. 3 describes the relationship between pH and Fe solubility.

From Fig. 3, it is shown that Fe concentration has reverse condition with pH values. The lower the Fe concentration, the higher the pH values. Amelioration treatment by giving lime increased the pH values so that Fe concentration decreased.

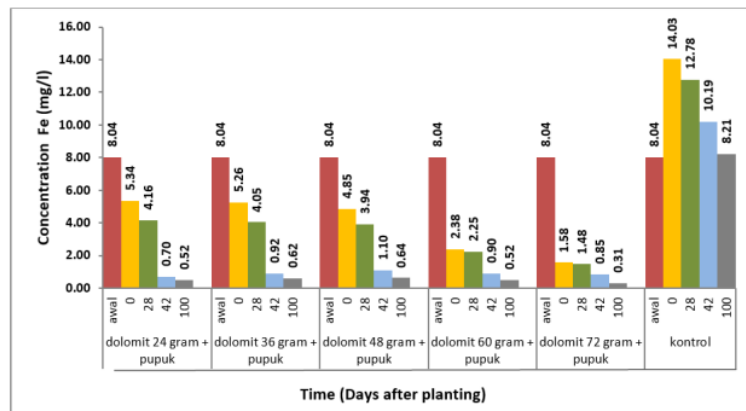


Fig. 2 The changes of Fe concentration

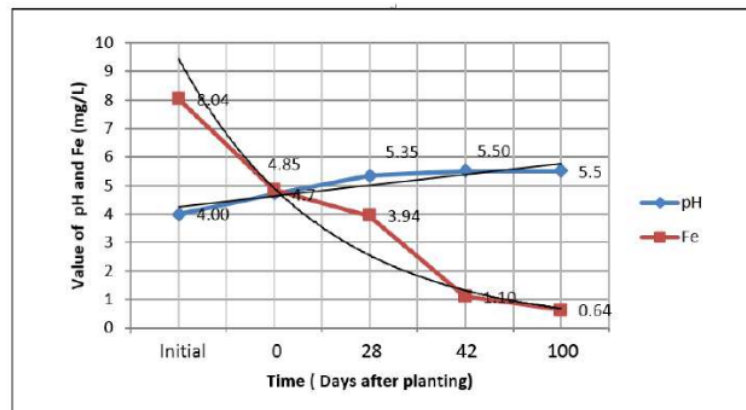


Fig. 3 The relationship between pH values and Fe solubility

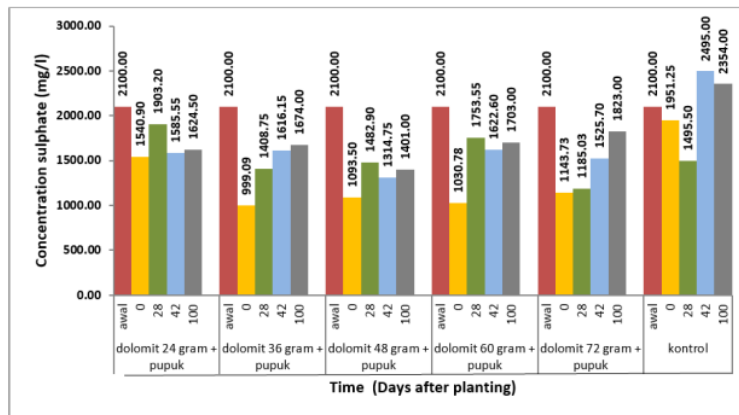


Fig. 4 The changes of sulphate concentration for different treatment

The changes of sulphate concentration is presented in Fig. 4. From Fig. 4, it can be explained that sulphate concentrations were not stable. The decrease of sulphate concentration was caused by giving ameliorant i.e. Dolomite ($\text{CaCO}_3\text{MgCO}_3$) so that SO_4^{2-} would form deposits of insoluble CaSO_4 and MgSO_4 .

The addition of Urea fertilizer will influence (NO_3^-) which soluble in water. The decomposition of Urea which was further oxidized, would produce Nitrate. These would cause NO_3^- and Fe^{2+} ions react with H_2SO_4 to form Fe^{3+} and SO_4^{2-} ions, also Nitrogen Oxide gas. This condition made SO_4^{2-} to increase.

The result of variety analysis shows that there is real influence for the treatment and the time of water sample taken (Table 1.) and the influence between water quality and time (Table 2).

Based on Table 1, it can be concluded that by giving 48 grams of lime and fertilizer, the water quality can be improved. Table 1 shows the rank of ameliorant and fertilizer dosages based on the lowest Fe concentration after treatment.

Therefore, the highest rank is the lowest Fe concentration. The numbers which were followed by the same letters are indifferent real based on DMRT 0.05. As conclusion, to determine the best dosage of ameliorant and fertilizer it can be assumed that it is the dosage with the highest rank which has the lowest Fe concentration.

From Table 2, it can described that time of water sample was taken with the best result is day-0 after planting. According to DMRT 0.05, day-0 after planting occupies the first place of the rank.

Based on statistical analysis, by giving ameliorant, it has given the influence to the water quality. The test result indicates that at day-0 after planting showed that

pH values tend to increase with significant decrease of Fe and SO_4^{2-} concentration. However, after the next treatment by giving fertilizer of Urea, SP36 and KCl, the decrease of Fe concentration was not significant. This was caused by Phosphate solubilization that reduces Fe^{3+} to become Fe^{2+} . Therefore the element of Phosphorus (P) would reduce. The increase of sulphate concentration after giving fertilizer predominantly was caused by the decomposition of Urea. If it is further oxidized, it would produce Nitrate. These would cause NO_3^- and Fe^{2+} ions react with H_2SO_4 to form Fe^{3+} and SO_4^{2-} ions, also Nitrogen Oxide gas. This condition made SO_4^{2-} to increase.

Table 1 The influence of giving lime and fertilizer for water quality parameters

| Giving Ameliorant and Fertilizer (Treatment) | Subset |
|--|-----------|
| Lime 48 grams + Fertilizer | 443.6617a |
| Lime 72 grams + Fertilizer | 454.4558a |
| Lime 36 grams + Fertilizer | 477.4438a |
| Lime 60 grams + Fertilizer | 511.4062a |
| Lime 24 grams + Fertilizer | 557.0492a |
| Control | 696.4767b |

Table 2 The influence of water quality to time of water sample was taken

| Time of water sample was taken (Days after Planting / DAP) | Subset |
|--|------------|
| 0 | 434.5044a |
| 28 | 515.9797ab |
| 42 | 566.9583b |
| 100 | 576.2197b |

CONCLUSIONS

Based on the study results, it can be concluded as follows:

1. The water quality parameters (pH, Fe and sulphate concentration) on tidal agriculture land, before and after treatment were experienced changes such as: the pH values raised from 4.00-5.50, Fe concentration were declined from 8.40 mg/l to 0.64 mg/l, and sulphate concentration were decreased from 2100 mg/l menjadi 1401 mg/l. The decrease of Fe and sulphate concentration were caused by giving ameliorant which was Dolomite ($\text{CaCO}_3\text{MgCO}_3$). It raised the pH values which made Fe^{2+} and SO_4^{2-} solubility tend to decline. The fertilizing treatment was capable of reducing plant sensitivity of iron poisoned.

2. Based on statistical analysis, the 48 grams of ameliorant (lime) was the best dosage which occupied the first rank.

REFERENCES

- Anwar, K. (2006). Peningkatan Kualitas Tanah Sawah dan Air Buangan di Saluran Drainase pada Tanah Sulfat Masam. Disertasi. DEPARTEMEN Ilmu Tanah dan Sumber Daya Lahan IPB, Bogor.
- Arsana, IGK.D., Yahya, S., Lontoh, A.P. and Pane, H. (2003). Hubungan Antara Penggenangan Dini dan Potensi Redoks, Prodnksi Etilen dan Pengaruhnya terhadap Pertumbuhan dan Hasil Padi (*Oryza safiva*) Sistem Tabela. *Bul. Agron.* 31(2): 37-41.
- Basset, J., Denney, R.C., Jeffery, G.J.I. and Mendham, J. (1994). Vogel: Kimia Analisis Kuantitatif Anorganik. Penerbit Buku Kedokteran EGC. Jakarta.
- Cyio, M.B. (2008). Efektifitas Bahan Organik dan TinggiGenangan terhadap Perubahan Eh, pH, dan Status Fe, P, Al terlarut pada Tanah Ultisol. *Journal of Agroland.* 15(4): 257-263.
- Departemen Pertanian. (2005). Petunjuk Penggunaan Perangkat Uji Tanah Sawah (Paddy Soil Test Kit) Versi 1.0. Balai Penelitian Tanah. Bogor.
- Departemen Pertanian. (2006). Karakteristik dan Pengelolaan Lahan Rawa. Balai Besar Penelitian dan Pengembangan Sumberdaya Lahan Pertanian. Bogor.
- Departemen Pertanian. (2007). Pengelolaan Tanaman Terpadu (PTT) Padi Sawah Irigasi. Badan Penelitian dan Pengembangan Pertanian. Jakarta Selatan.
- Lingga, P. and Marsono. (2007). Petunjuk Penggunaan Pupuk. Penebar Swadaya. Jakarta.
- Londong, P. (2009). Hubungan Pupuk NPK dengan Pertumbuhan dan Hasil Padi Mira I pada Lahan Pasang Surut. *Journal of Agroscentise.* 2(16): 112-115.
- Masganti. (2009). Rekomendasi Pemupukan Padi Sawah Lahan Pasang Surut Kecamatan Arut Selatan, Kabupaten Kotawaringin Barat, Kalimantan Tengah. Balai Pengkajian Teknologi Pertanian Lampung: 233-246.
- Noor, M., Supriyo, A., Hairani, A. Muhammad, M. Thamrin, Rina, Y. and Nurzakiah, S. (2010). Efektivitas Bahan Amelioran dan Pupuk Berdasarkan Status Hara pada IP 300 di Lahan Rawa Pasang Surut. Laporan Akhir. Balai Penelitian Pertanian Lahan Rawa, Banjarbaru.

THE INFLUENCE OF GIVING LIME AND FERTILIZER TO THE WATER QUALITY OF THE ACID-SULPHATE AGRICULTURE LAND MODEL

ORIGINALITY REPORT

15%

SIMILARITY INDEX

14%

INTERNET SOURCES

4%

PUBLICATIONS

2%

STUDENT PAPERS

PRIMARY SOURCES

| | | |
|---|---|----|
| 1 | research.ku.ac.th Internet Source | 1% |
| 2 | portal.dl.saga-u.ac.jp Internet Source | 1% |
| 3 | insightsociety.org Internet Source | 1% |
| 4 | www.mitrariset.com Internet Source | 1% |
| 5 | Submitted to Lambung Mangkurat University Student Paper | 1% |
| 6 | web.iitd.ac.in Internet Source | 1% |
| 7 | qldiem.ctu.edu.vn Internet Source | 1% |
| 8 | hyoka.ofc.kyushu-u.ac.jp Internet Source | 1% |

9

Rui Jia, Gang Zheng, Huayang Lei, Takenori Hino. "The effects of the depositional environment and post-depositional processes on the engineering properties of Quaternary clays in the Saga Plain", Bulletin of Engineering Geology and the Environment, 2019

Publication

1 %

10

nanopdf.com

Internet Source

1 %

11

www.coursehero.com

Internet Source

1 %

12

seags2.ait.ac.th

Internet Source

1 %

13

moam.info

Internet Source

1 %

14

repository.pertanian.go.id

Internet Source

1 %

15

www.geotech.cv.titech.ac.jp

Internet Source

1 %

16

Le Gia Lam, Dennes T. Bergado, Takenori Hino. "PVD improvement of soft Bangkok clay with and without vacuum preloading using analytical and numerical analyses", Geotextiles and Geomembranes, 2015

Publication

1 %

17

vdocuments.mx

Internet Source

1 %

18

repository.unair.ac.id

Internet Source

1 %

19

eng.sut.ac.th

Internet Source

1 %

20

gndec.ac.in

Internet Source

1 %

Exclude quotes Off

Exclude matches < 1%

Exclude bibliography Off