

**Materials Science Forum**

Details

Volumes

Editorial Board

Founding Editor

**Fred H. Wohlbiert**

Honorary Editor

**Prof. Graeme E. Murch****SEND MESSAGE**

University of Newcastle, PRC for Geotechnical Science and Engineering, School of Engineering; University Drive, Callaghan, Australia, NSW 2308;

Editor(s) in Chief

**Prof. Iulian Antoniac****SEND MESSAGE**

University Politehnica of Bucharest, Faculty of Materials Science and Engineering; 313 Splaiul Independentei, Bucharest, 060042, Romania;

Editorial Board

**Prof. Dezső L. Beke****SEND MESSAGE**

University of Debrecen, Department for Solid State Physics; Bem tér 18/b, Debrecen, 4026, Hungary;

**Prof. Giorgio Benedek****SEND MESSAGE**

University of Milano Bicocca, Department of Materials Science; U5, Università di Milano-Bicocca, Via R. Cozzi 55, Milano, 20125, Italy;

**Prof. Anil K. Bhatnagar****SEND MESSAGE**

University of Hyderabad, School of Physics and School of Engineering; Hyderabad, India, 500046;

**Prof. Chi Ming Chan****SEND MESSAGE**

Hong Kong University of Science and Technology, Department of Chemical and Biomolecular Engineering, Clear Water Bay; Kowloon, China;

**Roberto B. Figueiredo****SEND MESSAGE**

Federal University of Minas Gerais, Department of Metallurgical and Materials Engineering; Belo Horizonte, MG, 30, Brazil, 31270-901;

**Prof. Hermann G. Grimmeiss****SEND MESSAGE**

Lund University, Department of Solid State Physics; Box 118, Lund, 221 00, Sweden;

**Prof. Jerzy Jedlinski****SEND MESSAGE**

AGH University of Science and Technology, Faculty of Materials Science and Ceramics, Department of Physical Chemistry and Modeling of Processes and Surface Engineering; al. Mickiewicza 30, Kraków, 30-059, Poland;

**Prof. Megumi Kawasaki****SEND MESSAGE** [ORCID](#)

Oregon State University, School of Mechanical, Industrial and Manufacturing Engineering; 204 Rogers Hall, Corvallis, USA, 97331;

**Prof. Pentti O. Kettunen****SEND MESSAGE**

Tampere University of Technology, Department of Materials Science, Faculty of Automation, Energy and Materials Engineering; PO Box 589, Tampere, 33101, Finland;

**Prof. Terence G. Langdon****SEND MESSAGE**

University of Southampton, Faculty of Engineering and the Environment; Lanchester Building (Bldg. 7), Highfield Campus, Southampton, United Kingdom, SO17 1BJ;

**Prof. Jai Sung Lee****SEND MESSAGE**

Hanyang University, Department of Metallurgy and Materials Science; 55 Daehak-no, Sangnok-gu, Ansan, Korea, South, 426-791;

**Prof. Eric J. Mittemeijer****SEND MESSAGE**

Max Planck Institute for Intelligent Systems; Heisenbergstrasse 3, Stuttgart, 70569, Germany;

**Prof. Stephen J. Pearton****SEND MESSAGE**

University of Florida, Department of Materials Science and Engineering; Gainesville, USA, 32611-6400;

**Prof. Vassilis Pontikis****SEND MESSAGE**

Commissariat à l'Energie Atomique et les Energies Alternatives (CEA), CEA-Saclay; Bdg. 524, Gif-sur-Yvette, 91191, France;

**Prof. András Roósz****SEND MESSAGE**

Hungarian Academy of Sciences, Miskolc University (HAS-MU); Miskolc-Egyetemváros, 3515, Hungary;

**Prof. David N. Seidman****SEND MESSAGE**

Northwestern University, Department Materials Science and Engineering; Cook Hall, 2220 Campus Drive, Evanston, USA, 60208;

**Dr. Ching Hua Su****SEND MESSAGE**

NASA/Marshall Space Flight Center, EM31 NASA/Marshall Space Flight Center; Huntsville, USA, 35812;

**Prof. David Tomanek****SEND MESSAGE**

Michigan State University, Physics and Astronomy Department; 567 Wilson Road, East Lansing, USA, MI 48824-6455;

**Prof. A.S. Wronski****SEND MESSAGE**

University of Bradford, School of Engineering, Design and Technology; West Yorkshire, Bradford, United Kingdom, BD7 1DP;

**Prof. David J. Young****SEND MESSAGE**

# IOP Publishing celebrates

Recognising excellence in reviewing

[publishingsupport.iopscience.iop.org](http://publishingsupport.iopscience.iop.org)

OPEN

## Materials Science Forum

# 75

H Index

**Country** [Switzerland](#) - [IIII](#) [SIR Ranking of Switzerland](#)

**Subject Area and Category** [Engineering](#)  
[Mechanical Engineering](#)  
[Mechanics of Materials](#)

[Materials Science](#)  
[Materials Science \(miscellaneous\)](#)

[Physics and Astronomy](#)  
[Condensed Matter Physics](#)

**Publisher** [Trans Tech Publications](#)

**Publication type** [Book Series](#)

**ISSN** [02555476](#)

**Coverage** [1984-1986, 1994-2020](#)

**Scope** "Materials Science Forum" is a peer-reviewed journal which covers all aspects of theoretical and practical research of materials science: synthesis, analysis of properties, technology of materials processing and their use. "Materials Science Forum" is one of the largest periodicals in its field. "Materials Science Forum" specializes in the publication of thematically complete volumes from international conference proceedings and complete special topic volumes. We do not publish stand-alone papers by individual authors. Authors retain the right to publish an extended and significantly updated version in another periodical.

[?](#) [Homepage](#)

[How to publish in this journal](#)

[Contact](#)

[Join the conversation about this journal](#)

**IOP Publishing celebrates - Outstanding reviewers of 2019**

Recognising excellence in reviewing [publishingsupport.iopscience.iop.org](http://publishingsupport.iopscience.iop.org)

OPEN



# Materials Science Forum Vol. 988

doi: <https://doi.org/10.4028/www.scientific.net/MSF.988>

Search	< 1 2 3 >
Paper Title	Page
<p><b><u><a href="#">Activated Carbon Production Through Co-Pyrolysis of Vacuum Residue and Dehydrated Castor Oil</a></u></b>            Authors: Fachri Munad, Dijan Supramono            Abstract: Crude oil refineries in Indonesia produce waste in the vacuum distillation as vacuum residue and utilization is still low. Vacuum residue contains high aromatics which ...more</p>	73
<p><b><u><a href="#">Development and Characterization of Activated Carbons Derived from Lignocellulosic Material</a></u></b>            Authors: Dewa Ngakan Ketut Putra Negara, Tjokorda Gde Tirta Nindhia, Lusiana, I. Made Astika, Cokorda Istri Putri Kusuma Kencanawati            Abstract: Activated carbon is a multipurpose material due to its unique properties such as high surface area and pore volume. The reduced carbon source from coal has led to the ...more</p>	80
<p><b><u><a href="#">Transesterification of Kapok Seed Oil (<i>Ceiba pentandra</i>) Using Heterogeneous Catalyst Bimetallic Oxide of Zinc and Copper Supported by <math>\gamma</math>-Alumina</a></u></b>            Authors: Nyoman Puspa Asri, W.D. Prasetyo, A. Kafidhu, A. Atiqoh, E.A. Puspitasari, H. Hindarso, S. Suprpto            Abstract: Biodiesel was produced from Kapok seed (<i>Ceiba pentandra</i>) oil (KSO) using heterogeneous bimetallic oxide of copper and zinc supported by <math>\gamma</math>-alumina. The Alumina- ...more</p>	87
<p><b><u><a href="#">Biosurfactant Screening of <i>Halomonas meridiana</i> BK-AB4 for Microbial Enhanced Oil Recovery</a></u></b>            Authors: Naya Prakasita Putri, Cut Nanda Sari, Misri Gozan            Abstract: Biosurfactant is produced by a certain microorganism to reduce surface tension. Microbial enhanced oil recovery (MEOR) is one of the many applications of biosurfactant. ...more</p>	95
<p><b><u><a href="#">Calophyllolide Separation from <i>Calophyllum inophyllum</i> Oil by Silica Gel Adsorption</a></u></b>            Authors: Setiyo Gunawan, Brilian Pamungkas, Claudia Shantika Primaswari, Safrina Hapsari, Hakun Wirawasista Aparamarta            Abstract: Nyamplung (<i>Calophyllum inophyllum</i>), widely spreads in Indonesia archipelago, is known to have many advantages. It has various benefits that can be utilized from its root, ...more</p>	101
<p><b><u><a href="#">Development of Bamboo - Derived Activated Carbon as Catalyst Support for Glucose Hydrogenation</a></u></b>            Authors: Firman Kurniawansyah, Ratna Dewi Pertiwi, Mahendra Perdana, Muhammad Al-Muttaqii, Achmad Roesyadi            Abstract: Indonesia possesses high potential to develop an advanced biorefinery system, thanks to its high richness of natural resources. Bamboo for instance, with more than 200 ...more</p>	108
<p><b><u><a href="#">Effect of Two Stages Adsorption as Pre-Treatment of Natural Organic Matter Removal in Ultrafiltration Process for Peat Water Treatment</a></u></b>            Authors: Mahmud, Muthia Elma, Erdina Lulu Atika Rampun, Aulia Rahma, Amalia Enggar Pratiwi, Chairul Abdi, Raisa Rossadi            Abstract: Natural Organic Matter (NOM) content in peat water is a major problem of membrane fouling in ultrafiltration (UF). For that, two stages adsorption as pre-treatment ...more</p>	114
<p><b><u><a href="#">Triacetin Production by Selective Esterification of Glycerol over Activated Zeolite and Lewatite as Catalyst</a></u></b>            Authors: Lucky Setyaningsih, Ibrahim Akbar Ali, Achmad Chafidz, Singgih Septiyan, Pangestu Aditya Eka            Abstract: The conversion of glycerol as by product of biodiesel manufacture into value-added product was studied. Esterification of glycerol with acetic acid to triacetin was ...more</p>	122
<p><b><u><a href="#">Kinetic Study of Catalytic Hydrocracking <i>Ceiba Pentandra</i> Oil to Liquid Fuels over Nickel-Molybdenum/HZSM-5</a></u></b>            Authors: Yustia Wulandari Mirzayanti, Danawati Hari Prajitno, Achmad Roesyadi, E. Febriyanti            Abstract: The conversion of <i>Ceiba pentandra</i> oil to catalytic hydrocracking are suitable ways for biofuel. The focus of this study is to use <i>Ceiba Pentandra</i> oil catalytic hydrocarbon ...more</p>	128
<p><b><u><a href="#">Activated Carbon Production by Co-Pyrolysis of Vacuum Residue and Gum Rosin</a></u></b>            Authors: Anisa Maulida, Dijan Supramono            Abstract: Vacuum residue (VR) is potential to be used as a feedstock for mesophase pitch (MP) production because of its low cost and aromatic content. MP, which is a liquid- ...more</p>	137

## Details

## Volumes

## Editorial Board

**About:**

"Materials Science Forum" is a peer-reviewed journal which covers all aspects of theoretical and practical research of materials science: synthesis, analysis of properties, technology of materials processing and their use. "Materials Science Forum" is one of the largest periodicals in its field.

"Materials Science Forum" specializes in the publication of thematically complete volumes from international conference proceedings and complete special topic volumes. We do not publish stand-alone papers by individual authors.

Authors retain the right to publish an extended and significantly updated version in another periodical.

All published materials are archived with [PORTICO](#) and [CLOCKSS](#).

Abstracted/Indexed in:

SCOPUS [www.scopus.com](http://www.scopus.com).

REAXYS [www.reaxys.com](http://www.reaxys.com).

Ei Compendex [www.ei.org/](http://www.ei.org/).

Chimica <https://www.elsevier.com/solutions/engineering-village/content#chimica>.

Inspec (IET, Institution of Engineering Technology) [www.theiet.org](http://www.theiet.org).

Chemical Abstracts Service (CAS) [www.cas.org](http://www.cas.org).

Google Scholar [scholar.google.com](http://scholar.google.com).

GeoRef [www.americangeosciences.org/georef](http://www.americangeosciences.org/georef).

NASA Astrophysics Data System (ADS) <http://www.adsabs.harvard.edu/>.

INIS Atomindex (International Nuclear Information System) <https://inis.iaea.org>.

Cambridge Scientific Abstracts (CSA) [www.csa.com](http://www.csa.com).

ProQuest [www.proquest.com](http://www.proquest.com).

Ulrichsweb [www.proquest.com/products-services/Ulrichsweb.html](http://www.proquest.com/products-services/Ulrichsweb.html).

EBSCOhost Research Databases [www.ebscohost.com/](http://www.ebscohost.com/).

Zetoc [zetoc.jisc.ac.uk](http://zetoc.jisc.ac.uk).

EVISA <http://www.speciation.net/Public/Linklists/EVISA.html>.

Index Copernicus Journals Master List [www.indexcopernicus.com](http://www.indexcopernicus.com).

WorldCat (OCLC) [www.worldcat.org](http://www.worldcat.org).

ISSN print 0255-5476 ISSN cd 1662-9760 ISSN web 1662-9752

**Additional Information:**

Please ask for additional information: [msf@scientific.net](mailto:msf@scientific.net)

32 volumes per year

**Subscription**

WEB ACCESS 2021: Volumes 1016 - 1047 (32 Vols.)

Access January - December 2021

The Journal published as of 1984 - 2020: 1015 Vols.

Online Subscription Price 2021: EUR 2'560 / US\$ 2'810 (Option 1)

Online Subscription Price 2021 with access only to all Back Volumes: EUR 3'680 / USD 4'040 (Option 2)

Back Files purchase (perpetual access) on request (Option 3)

Benefits to libraries: • Outright purchase • Perpetual access rights • Multiple concurrent users • Long-time preservation • COUNTER-compliant usage statistics • Pick & Choose licensing options as well as package options. • 24/7 access on [www.scientific.net](http://www.scientific.net) • Freedom to use offline or print • Advanced search options

Please contact us for all subscription options, including access to backvolumes, multisite & archival licensing at [subscriptions@scientific.net](mailto:subscriptions@scientific.net)

**Share:**

# mahmud2020.pdf

*by*

---

**Submission date:** 22-Jul-2020 01:03AM (UTC+0700)

**Submission ID:** 1360468402

**File name:** mahmud2020.pdf (353.38K)

**Word count:** 3663

**Character count:** 19569

## Effect of Two Stages Adsorption as Pre-Treatment of Natural Organic Matter Removal in Ultrafiltration Process for Peat Water Treatment

Mahmud<sup>2,a</sup>, Muthia Elma<sup>1,3b\*</sup>, Erdina Lulu Atika Rampun<sup>1,3c</sup>, Aulia Rahma<sup>1,3d</sup>,  
Amalia Enggar Pratiwi<sup>1,3e</sup>, Chairul Abdi<sup>2,f</sup>, Raisa Rossadi<sup>2,g</sup>

<sup>1</sup>Chemical Engineering Department, Faculty of Engineering, Lambung Mangkurat University, Banjarbaru, 70714, Indonesia

<sup>2</sup>Environmental Engineering Department, Faculty of Engineering, Lambung Mangkurat University, Banjarbaru, 70714, Indonesia

<sup>3</sup>Material and Membrane Research Group (M<sup>2</sup>ReG), Lambung Mangkurat University, Banjarbaru, 70714, Indonesia

<sup>a</sup>Mahmud@ulm.ac.id, <sup>b</sup>melma@ulm.ac.id, <sup>c</sup>elarampun@mhs.ulm.ac.id, <sup>d</sup>arahma@mhs.ulm.ac.id  
<sup>e</sup>aepratiwi@mhs.ulm.ac.id, <sup>f</sup>chairulabdi@ulm.ac.id, <sup>g</sup>raissa.rosadi@gmail.com

**Keywords:** Adsorption, natural organic matter, fouling, pretreatment, ultrafiltration

**Abstract.** Natural Organic Matter (NOM) content in peat water is a major problem of membrane fouling in ultrafiltration (UF). For that, two stage adsorption as pre-treatment was employed to minimize the membrane fouling of NOM content. This research was carried out to investigate the effect of two stages adsorption on ultrafiltration performance for NOM removal that remains in peat water. This method was using powdered activated carbon (PAC) dosage of 80, 160, 240, 320, 400, 480, 560, 640, 720, 800, 880 dan 960 mg.L<sup>-1</sup>. Then, Polysulfone (Psf) material was employed for Ultra filtration process. Membrane was applied in a dead-end mode with various operating pressure (1; 1.5; 2; 2.5; 3 bar). As a results, the optimum dose of PAC was 800 mg L<sup>-1</sup> with dosage ratio of 3/4:1/4. Two stages adsorption-UF PSf provided the range from 86.9 to 92.8% of KMnO<sub>4</sub> and 74.1-88.1% of UV<sub>254</sub>. For the experimental condition of 3 bar, the highest flux was achieved up to 39.919 L h<sup>-1</sup>.m<sup>-2</sup>.

### Introduction

Peat water is stored in a peatland and can be found in temperate zone. Amount of natural organic matter (NOM) is present in peat water include humic acid and acidic as well [1]. In general, NOM can be divided into three fraction: hydrophobic (dissolved organic carbon with larger molecular weight), hydrophilic (smaller molecular weight such as: polysaccharides, amino acid, protein and etc) and amphiphilic (molecular weight between hydrophobic and hydrophilic) [2, 3]. Hence, it is important to treat a peat water.

Ultrafiltration (UF) is an alternative technology to improve water quality [4]. Nevertheless, membrane fouling is still unavoidable problem [5, 6]. Fouling is occurred when foulant deposit on membrane surface or block the pore. It can make a flux drop and lowered membrane performance. In a previous study shows NOM can cause fouling in UF membrane. Although hydrophilic fractions have less impact on water quality, but studies show large size molecules of hydrophilic NOM have greatly main contribute to fouling [7]. Many methods have been reported to minimize the fouling such as photocatalytic [8], oxidation and ozonation [9], coagulation-flocculation [10], and adsorption [11]. Among them, adsorption using activated carbon good to removes hydrophilic NOM [12, 13].

Adsorption of NOM by activated carbon can be pre-treatment [14]. To increase efficiency of NOM adsorption, two stage adsorption using powdered activated carbon (PAC) can be applied. Two stage adsorption process worked by divided adsorbent capability to transfer adsorbate to adsorbent surface itself. It would maximize efficiency removal and required lower dosage rather than one stage adsorption [15]. However, some researches still have pros and cons about PAC effect on membrane fouling Tansakul, Laborie and Cabassud [16] and Campinas and Rosa [17] have investigated PAC as pre-treatment reduce membrane fouling which caused by NOM. In other hand, many researches also

found different results. Combination between PAC and NOM lead to membrane fouling more severe [18-20].

Polysulfone has chosen as polymer because it have highly strength structure on high temperature and chemical resistant [21]. But polysulfone membrane has hydrophobic properties and vulnerable to NOM fouling [22, 23]. So, PEG additive is added to enhance membrane selectivity [24]. Several studies have treat peat water using cellulose acetate [25, 26] and polysulfone membrane [27-29]. In the present work, two stage adsorption with PAC as pre-treatment is carried out to investigated it is the effect on UF PSf performance. Flat sheet of UF membranes were varied at 1-3 bar. Further,  $\text{KMnO}_4$  and  $\text{UV}_{254}$  rejection are determined to represent organic and NOM.

## Materials and Methods

**Materials.** A peat water was collected in KM 17 Banjar regency, South Kalimantan. Polysulfone (Merck), N,N-dimethylacetamide (DMAc) (Merck), Polyethylene Glycol 600 (Merck), KCL 0.5% (Merck), acetone 70% (Merck),  $\text{H}_2\text{SO}_4$ , NaOH (Emsure), oxalic acid (Merck), aquadest, and PAC (Merck), TOC analyzer (Shimidzu), UV-vis, pH meter (Hanna).

**UF membrane synthesis.** Thin film were prepared using phase inversion technique. Firstly, 64% by weight of DMAc was mixed with 18% by weight of PEG until get homogenous solution. Furthermore, polysulfone (18% by weight) was stirred into solution for 24 hours under room temperature.

Coagulation bath were made from DMAc (35% by weight), aquadest, and impregnation KCL (0.5% by weight). KCL was used to make water diffusion rate more slowly. Solution was then cast on clean glass plate, then leave it contact with air for 10 seconds. Lastly, thin film on plate was directly immersed in the coagulation bath which prepared before.

**Two stage adsorption of pre-treatment.** Characterization of peat water were analyzed using DOC, UV at 245 nm ( $\text{UV}_{254}$ ),  $\text{SUVA}_{254}$  ( $\text{UV}_{254}/\text{DOC}$ ), pH and  $\text{KMnO}_4$  as parameters. Variation of PAC dosage was added to 200 ml of peat water (80, 160, 240, 320, 400, 480, 560, 640, 720, 800, 880 and 960 mg.L<sup>-1</sup>) after kept pH 4 constant and stirred under 180 rpm for 120 minute using rotary shaker. This condition refer to previous worked by Aziza [30].  $\text{KMnO}_4$  and  $\text{UV}_{254}$  were tested using titration and UV-Vis, respectively. Optimum dose of PAC was chosen based on the removal.

This optimum dose then used to applied on the next step. In two stage adsorption, PAC was gradually added in two steps by variation of dose ratio (1/4:3/4); (1/3:2/3); (1/2:1/2); (2/3:1/3) of optimum dose. On the first step, 1/4 of optimum dose was mixed into peat water (pH 4) under 180 rpm for 60 minutes. A treated water then filtered by a filter paper before continue to the second step. After that, 3/4 of optimum dose was added again for the second time under same condition (180 rpm, 60 minutes). Repeat it for other dose ratio. Optimum dose ratio was obtained.

**Adsorption UF membrane performance.** For filtration tests, new membrane were used in all cases. The water flux of aquadest was tested to know the pure water permeability as well as PAC+aquadest to investigated the effect of PAC without NOM presence. At the beginning, optimum PAC of dose ratio was added to peat water as pre-treatment. Furthermore, a peat water was flowed through UF membrane (Fig 1). The experiments were carried out with dead end system in varied pressure (1; 1.5; 2; 2.5; and 3 bar) for 1 hour.




Figure 1. Ultrafiltration set-up



The fluxes <sup>3</sup> was calculated by the following equation (Eq. 1):

$$J = \frac{V}{A \times t} \quad (1)$$

Where J is water flux (L.m<sup>-2</sup>.h<sup>-1</sup>), V is Volume (L), A is <sup>16</sup>membrane surface area (m<sup>2</sup>) and t is time (hour) Rejection of KMnO<sub>4</sub> and UV<sub>254</sub> were determined by the following equation (Eq.2):

$$R = \left( 1 - \frac{C_p}{C_f} \right) \times 100\% \quad (2)$$

R is removal efficiency (%), <sup>8</sup> C<sub>p</sub> is permeate concentration, and C<sub>f</sub> is feed concentration.

## Results and Discussion

**Peat water characteristics.** High organic and low pH of peat <sup>14</sup> water are presented in **Table 1**. So <sup>14</sup> this water is basically not suitable to be consumed [30]. Further, to understand membrane fouling, some parameter such as Dissolved Oxygen Carbon (DOC), UV<sub>254</sub>, and SUVA<sub>254</sub> are important to know. DOC as measure of NOM. UV<sub>254</sub> is good to represent aromatic character on NOM [31]. While, SUVA<sub>254</sub> (DOC divided by UV<sub>254</sub>) is known to provide NOM distribution as hydrophobic or hydrophilic, low or high molecular weight <sup>23</sup> As summarized in table 3.1, according to Edzwald and Tobiason [32] SUVA<sub>254</sub> values between 2-4 L mg<sup>-1</sup> m<sup>-1</sup> indicating this peat water has mixture of hydrophilic and hydrophobic.

<sup>13</sup> **Table 1.** Peat water characteristics

Parameter	Unit	Value
pH	-	6.3
DOC	mg/L	36.4
UV <sub>254</sub>	1/Cm	0.98
KMnO <sub>4</sub>	mg/L KMnO <sub>4</sub>	120.08
SUVA <sub>254</sub>	L/mg.m	2.68

**Two stage adsorption.** During the experiment, optimum dose was observed in **Fig 2** before a peat water passed through membrane. It shows the removal efficiency of KMnO<sub>4</sub> and UV<sub>254</sub> tend to be constant after PAC dose increase (>720 mg.L<sup>-1</sup>). It is because the adsorption does not run optimally when too many cation of PAC exist known as restabilization process. In addition, on low of PAC dose (80-720 mg.L<sup>-1</sup>) higher removal efficiency of KMnO<sub>4</sub> was found than UV<sub>254</sub>. This results indicated that PAC has good performance to remove the total of organic but beyond 800-960 mg.L<sup>-1</sup> the removal of hydrophobic fraction increased immediately. PAC treatment resulting in a decrease both of hydrophobic and hydrophilic fraction [12, 33]. Because of this 800 mg.L<sup>-1</sup> was chosen for optimum dose.

Furthermore, 800 mg.L<sup>-1</sup> of PAC dose was added in two steps. As given by Fig 3, the ratio of dose 3/4:1/4 result in a higher removal efficiency for KMnO<sub>4</sub> and UV<sub>254</sub>. It means put a large of PAC dose at the first step then later on, give much smaller dose is more effective on NOM removal. This finding also found on Chairuddin [15] and Pradista [34] work. Two stage adsorption can maximize the removal.

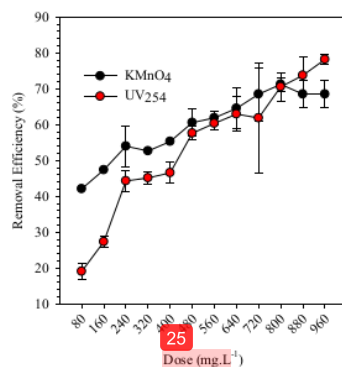


Figure 2. Effect of PAC adsorption on organic removal.




Figure 3. Effect of adsorption two stage using 800 mg.L<sup>-1</sup> of dose optimum on organic removal.


**Performance of two stage adsorption-UF PSf.** Two stage adsorption. Fig 4 shows the more pressure is given, the higher water fluxes were obtained for aquadest and peat water. The highest water flux of aquadest is 151.24 L.m<sup>-2</sup>.h<sup>-1</sup> for 3 bar. This prepared UF PSf can be categorized as ultrafiltration membrane because the permeability is produce within 20-200 L.m<sup>-2</sup>.h<sup>-1</sup> [26, 35]. When blank (aquadest+PAC) entered the UF PSf membrane, it delivers 20.3-95.65 L.m<sup>-2</sup>.h<sup>-1</sup> of water fluxes. These water fluxes are 54% lower than aquadest. It suggests PAC may impact on reducing water flux. Similar case also reported by Tomaszewska and Mozia [36]. Contrary to the result found by Lin, Lin and Hao [37]. Nevertheless, some studies investigated PAC did not affected on extent of flux decline using hydrophilic UF membrane [38, 39].

Highest water fluxes of peat water is achieve 39.91 L.m<sup>-2</sup>.h<sup>-1</sup> (Fig 4). The significant flux drop obviously happened until 73% and 58% compare to aquadest and blank for 3 bar, respectively. Before a peat water has entered the membrane module that undergo adsorption treatment. Two stage adsorption added 3/4:1/4 of optimum dose. Overall the fluxes were decrease on each operating pressure. This phenomena has occurred due to polarization concentration. It is when some particles accumulated on the membrane surface and formed a layer on it. Thus, can reduce the UF membrane performance [6, 40]. Also NOM was attached on the top of membrane surface known as cake layer. Cake layer tightly compact and contribute to worse water flux.


In experiment, NOM could act as glue that make particles easily binding and deposited on membrane surface. Moreover, humic acid can change the shape itself and trapped between PAC-membrane and PAC-PAC [41]. Jucker and Clark [42] studied low pH in peat water exacerbates

membrane fouling because it raising the membrane and molecules interaction as hydrophobicity in solution increase as well. As a results flux drop was observed. However, two stage adsorption-UF PSf obtained 92.8 and 88.11% of removal efficiency for  $\text{KMnO}_4$  and  $\text{UV}_{254}$ , respectively (**Fig 5**). NOM cannot be removed only by using UF alone [38]. By operating UF, lower pressure applied is good on removal. It is because the smaller feed velocity makes particle easy to filter. This results agree with other study reported [43].

To overcome NOM-PAC deposition, pretreatment and backwashing is mostly used [44]. Several parameters such as the structural properties of PAC [45] and membrane type [38, 39] may influence on NOM removal and fouling mitigation. Hence, they need to be considered first.

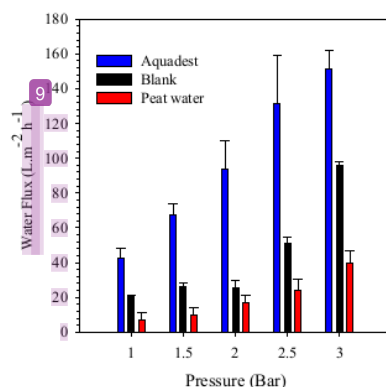

**Figure 4.** Water fluxes using two stage adsorption-UF PSf

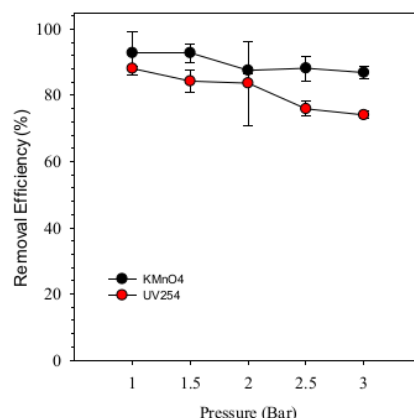

**Figure 5.**  $\text{KMnO}_4$  and  $\text{UV}_{254}$  removal using two stage adsorption-UF PSf

### Conclusion

Based on experimental results, the best dose optimum of PAC was obtained 800 mg.L<sup>-1</sup> and ratio of PAC dose was 3/4:1/4 for treating peat water. Two stage adsorption-UF PSf provided the range 86.9-92.8% of  $\text{KMnO}_4$  and 74.1-88.1% of  $\text{UV}_{254}$ . For the experimental condition of 3 bar, the highest flux was achieve until 39.919 L. m<sup>-2</sup> h<sup>-1</sup>. This study point out that PAC may impact the water fluxes on polysulfone membrane. Although it was successfully remove NOM in the peat water.

### Acknowledgments

The authors acknowledge to the facilities from Environmental Laboratory and Process Technology Laboratory, Engineering Faculty, Lambung Mangkurat University. Muthia thanks to Alumni Grants Scheme Batch in 2018-2019, Applied Research Universities Grant 2019-2020, Thesis Magister Grant 2019 and Post-Doctoral Grant 2017-2018, Directorate of Research and Community Service, the Ministry of Research, Technology and Higher Education Republic of Indonesia.

### References

- [1] I. Sutzkover-Gutman, D. Hasson, R. Semiat, Humic substances fouling in ultrafiltration processes, *Desalination*. 261 (2010) 218-231.
- [2] X. Cui, K.-H. Choo, Natural organic matter removal and fouling control in low-pressure membrane filtration for water treatment, *Environmental Engineering Research*. 19 (2014) 1-8.
- [3] A.W. Zularisam, A.F. Ismail, M.R. Salim, M. Sakinah, H. Ozaki, The effects of natural organic matter (NOM) fractions on fouling characteristics and flux recovery of ultrafiltration membranes, *Desalination*. 212 (2007) 191-208.
- [4] Mahmud, C. Abdi, B. Mu'min, Removal Natural Organic Matter (NOM) in Peat Water From Wetland Area By Coagulation-Ultrafiltration Hybrid Process With Pretreatment Two Stage Coagulation, *Journal of Wetlands Environmental Management*. 1 (2013) 1-8.
- [5] E. Akhondi, F. Wicaksana, A.G. Fane, Evaluation of Fouling Deposition, Fouling Reversibility and Energy Consumption of Submerged Hollow Fiber Membrane Systems with Periodic Backwash *Memb Sci*. 452 (2014) 319-331.
- [6] A.W. Zularisam, A.F. Ismail, R. Salim, Behaviours of Natural Organic Matter in Membrane Filtration for Surface Water Treatment: A Review, 194 (2006) 211-231.
- [7] A.W. Zularisam, I. A.F., S. M.R., M. Sakinah, H. Ozaki, The Effects of Natural Organic Matter (NOM) Fractions on Fouling Characteristics and Flux Recovery of Ultrafiltration Membranes., *Desalination*. (2007) 191-208.
- [8] P. Singh, M.C. Vishnu, K.K. Sharma, R. Singh, S. Madhav, D. Tiwary, P.K. Mishra, Comparative study of dye degradation using TiO<sub>2</sub>-activated carbon nanocomposites as catalysts in photocatalytic, sonocatalytic, and photosonocatalytic reactor, *Desalination and Water Treatment*. 57 (2016) 20552-20564.
- [9] S.S. Hutagalung, I. Muchlis, B. Herlambang, A. Turnip, in: 2014 2nd International Conference on Technology, Informatics, Management, Engineering & Environment, 2014, pp. 288-291.
- [10] A. Rahma, M. Elma, M. Mahmud, C. Irawan, A.E. Pratiwi, E.L.A. Rampun, Removal of natural organic matter for wetland saline water desalination by coagulation-pervaporation, *Journal of Scientific & Applied Chemistry*. 22 (2019) 8.
- [11] K.K. Shimabuku, A.M. Kennedy, R.E. Mulhern, R.S. Summers, Evaluating Activated Carbon Adsorption of Dissolved Organic Matter and Micropollutants Using Fluorescence Spectroscopy, *Environmental Science & Technology*. 51 (2017) 2676-2684.
- [12] V. Uyak, M. Akdagli, M. Cakmaci, I. Koyuncu, Natural Organic Matter Removal and Fouling in a Low Pressure Hybrid Membrane Systems *The Scientific World Journal*. (2014) 1-12.
- [13] H.K. Shon, S. Vigneswaran, I.S. kim, J. Cho, N. H.H, The Effect of Pretreatment to Ultrafiltration of Biologically Treated Sewage Effluent: A detailed Effluent Organic Matter (EfOM) Characterization, *Water Res*. 38 (2004) 1933-1939.
- [14] K. Li, H. Liang, F. Qu, S. Shao, H. Yu, Z. Han, X. Du, G. Li, Control of Natural Organic Matter Fouling of Ultrafiltration Membrane by Adsorption Pretreatment: Comparison of Mesoporous Adsorbent Resin and Activated Carbon, *Memb Sci*. 411-412 (2014) 1-12.
- [15] M.A. Chairuddin, in: Environmental Engineering Study Program, Engineering Faculty, Universitas Lambung Mangkurat, Banjarbaru, 2014.
- [16] C. Tansakul, S. Laborie, C. Cabassud, Adsorption combined with ultrafiltration to remove organic matter from seawater, *Water Research*. 45 (2011) 6362-6370.

- 
- [17] M. Campinas, M.J. Rosa, Assessing PAC Contribution to the NOM Fouling Control in PAC/UF Systems, *Water Res.* 44 (2010) 1636-1644.
- [18] S. Shao, H. Liang, F. Qu, K. Li, H. Chang, H. Yu, G. Li, Combined Influence by Humic Acid (HA) and Powdered Activated Carbon (PAC) Particles on Ultrafiltration Membrane Fouling, *Memb Sci.* 500 (2016) 90-105.
- [19] F. Saravia, F.H. Frimmel, Role of NOM in the Performane of Adsorption-Membrane Hybrid Systems Applied for the Removal of Pharmaceuticals, *Desalination.* 224 (2008) 168-171.
- [20] H. Oh, M. Yu, S. Takizawa, S. Ohgaki, Evaluation of PAC Behavior and Fouling Formation in an Integrated PAC-UF Membrane for Surface Water Treatment, *Desalination.* 192 (2006) 54-62.
- [21] P.T.P. Aryanti, Khoiruddin, W. I.G, Influence of Additives on Polysulfone-Based Ultrafiltration Membrane Performance during Peat Water Filtration, *Journal of Water Sustainability.* 3 (2013) 85-96.
- [22] K. Kimura, Y. Hane, Y. Watanabe, G. Amy, N. Ohkuma, Irreversible membrane fouling during ultrafiltration of surface water, *Water Research.* 38 (2004) 3431-3441.
- [23] M.M. Clark, P. Lucas, Diffusion and partitioning of humic acid in a porous ultrafiltration membrane, *Journal of Membrane Science.* 143 (1998) 13-25.
- [24] X. Chen, J. Luo, B. Qi, W. Cao, Y. Wan, NOM fouling behavior during ultrafiltration: Effect of membrane hydrophilicity, *Journal of Water Process Engineering.* 7 (2015) 1-10.
- [25] R. Riduan, Studi Pengaruh Penambahan Karbon Aktif Pada Optimasi Penurunan Warna Dan Kandungan Organik Pada Air Gambut Menggunakan Membran Ultrafiltrasi, *Info Teknik.* 6 (2005) 54-60.
- [26] N. Herwati, Mahmud, C. Abdi, Pengaruh pH Air Gambut terhadap Fouling Membran Ultrafiltrasi, *Jukung Jurnal teknik Lingkungan.* 1 (2015) 59-73.
- [27] D. Ariono, P.T.P. Aryanti, S. Subagio, I.G. Wenten, The Effect of Polymer Concentration on Flux Stability of Polysulfone Membrane, *AIP Conference Proceedings.* 1788 (2017).
- [28] P.T.P. Aryanti, S.R. Joscarita, A.K. Wardani, S. Subagio, D. Ariono, I.G. Wenten, The Influence of PEG400 and Acetone on Polysulfone Membrane Morphology and Fouling Behaviour, *Journal of Engineering and Technological Sciences.* 48 (2016).
- [29] D. Ariono, P.T.P. Aryanti, S. Subagio, I.G. Wenten, The effect of polymer concentration on flux stability of polysulfone membrane, *AIP Conference Proceedings.* 1788 (2017) 030048.
- [30] EPA, in, 2019.
- [31] A. Matilainen, E.T. Gjessing, T. Lahtinen, L. Hed, A. Bhatnagar, M. Sillanpää, An overview of the methods used in the characterisation of natural organic matter (NOM) in relation to drinking water treatment, *Chemosphere.* 83 (2011) 1431-1442.
- [32] J.K. Edzwald, J.E. Tobiason, Enhanced coagulation: US requirements and a broader view, *Wat Sci Tech.* 40 (1999) 63-70.
- [33] D. Wang, Q.-Y. Hu, M. Li, C. Wang, M. Ji, Evaluating the Removal of Organic Fraction of Commingled Chemical Industrial Wastewater by Activated Sludge Process Augmented with Powdered Activated Carbon, *Arabian Journal of Chemistry.* 15 (2015).
- [34] D.S. Pradista, in: *Fakultas Teknik, Universitas Lambung Mangkurat, Banjarbaru, 2016.*
- [35] I.G. Wenten, *Teknologi Membran Industrial, ITB, Bandung, 1999.*
- [36] M. Tomaszewska, S. Mozia, Removal of organic matter from water by PAC/UF system, *Water Res.* 36 (2002) 4137-4143.
- [37] C.-F. Lin, T.-Y. Lin, O.J. Hao, Effects of humic substance characteristics on UF performance, *Water Research.* 34 (2000) 1097-1106.
- [38] S. Mozia, M. Tomaszewska, A.W. Morawski, Studies on the effect of humic acids and phenol on adsorption-ultrafiltration process performance, *Water Res.* 39 (2005) 501-509.
- [39] C.-W. Li, Y.-S. Chen, Fouling of UF membrane by humic substance: Effects of molecular weight and powder-activated carbon (PAC) pre-treatment, *Desalination.* 170 (2004) 59-67.

- 
- [40] S. Notodarmojo, T.Zulkarnain, D. Mayasanthi, M. Irsyad, Efek Pretreatment Terhadap Pembentukan Lapisan Cake dan Struktur Membrane pada Membran Ultrafiltrasi Aliran Cross-flow dalam Pengolahan Limbah Cair Emulsi Minyak, Proc ITB Sains & Tek. 36 (2004) 127-144.
- [41] S. Shao, L. Cai, K. Li, J. Li, X. Du, G. Li, H. Liang, Deposition of powdered activated carbon (PAC) on ultrafiltration (UF) membrane surface: influencing factors and mechanisms, Journal of Membrane Science. 530 (2017) 104-111.
- [42] C. Jucker, M.M. Clark, Adsorption of aquatic humic substances on hydrophobic ultrafiltration membranes, Journal of Membrane Science. 97 (1994) 37-52.
- [43] H.A. Maddah, A.S. Alzhrani, M. Bassyouni, M.H. Abdel-Aziz, M. Zoromba, A.M. Almalki, Evaluation of various membrane filtration modules for the treatment of seawater, Applied Water Science. 8 (2018) 150.
- [44] A.W. Zularisam, A.F. Ismail, R. Salim, Behaviours of natural organic matter in membrane filtration for surface water treatment — a review, Desalination. 194 (2006) 211-231.
- [45] M. Schulz, S. Bünting, M. Ernst, Impact of Powdered Activated Carbon Structural Properties on Removal of Organic Foulants in Combined Adsorption-Ultrafiltration, Water. 9 (2017) 580.

ORIGINALITY REPORT

13%

SIMILARITY INDEX

7%

INTERNET SOURCES

10%

PUBLICATIONS

6%

STUDENT PAPERS

PRIMARY SOURCES

- 1 Muthia Elma, Nur Riskawati, Marhamah. "Silica Membranes for Wetland Saline Water Desalination: Performance and Long Term Stability", IOP Conference Series: Earth and Environmental Science, 2018  
Publication 1%
- 2 [www.coursehero.com](http://www.coursehero.com)  
Internet Source 1%
- 3 [mdpi.com](http://mdpi.com)  
Internet Source 1%
- 4 Meilana Dharma Putra, Chairul Irawan, Udiantoro, Yuli Ristianingsih, Iryanti Fatyasari Nata. "A cleaner process for biodiesel production from waste cooking oil using waste materials as a heterogeneous catalyst and its kinetic study", Journal of Cleaner Production, 2018  
Publication 1%
- 5 Efrem Curcio, Enrico Drioli. "Chapter 3 Membranes for Desalination", Springer Science 1%

- |    |  |     |
|----|--|-----|
| 6  | Anisa Maulida, Dijan Supramono. "Activated Carbon Production by Co-Pyrolysis of Vacuum Residue and Gum Rosin", Materials Science Forum, 2020<br>Publication  | 1%  |
| 7  | Amin Dehban, Ali Kargari, Farzin Zokaei Ashtiani. "Preparation and optimization of antifouling PPSU/PES/SiO <sub>2</sub> nanocomposite ultrafiltration membranes by VIPS-NIPS technique", Journal of Industrial and Engineering Chemistry, 2020<br>Publication | 1%  |
| 8  | Haigang Li, Ping Yu, Yunbai Luo. "Fouling mechanisms and primary foulant constituents in reverse osmosis membrane reclamation of a petrochemical secondary effluent", Desalination and Water Treatment, 2014<br>Publication                                    | <1% |
| 9  | <a href="https://repository.ntu.edu.sg">repository.ntu.edu.sg</a><br>Internet Source   | <1% |
| 10 | <a href="https://scholarbank.nus.edu.sg">scholarbank.nus.edu.sg</a><br>Internet Source   | <1% |
| 11 | Submitted to Universiteit van Amsterdam<br>Student Paper   | <1% |
-



12

Sen Zhang, Yu Yang, Satoshi Takizawa, Li-an Hou. "Removal of dissolved organic matter and control of membrane fouling by a hybrid ferrihydrite-ultrafiltration membrane system", Science of The Total Environment, 2018

Publication

<1%

13

Gema Sakti Raspati, Hanne Næss Høvik, TorOve Leiknes. "Preferential fouling of natural organic matter (NOM) fractions in submerged low-pressure membrane filtration", Desalination and Water Treatment, 2011

Publication

<1%

14

Submitted to Cranfield University

Student Paper

<1%

15

[worldwidescience.org](http://worldwidescience.org)

Internet Source

<1%

16

[ses.library.usyd.edu.au](http://ses.library.usyd.edu.au)

Internet Source

<1%

17

[researchbank.rmit.edu.au](http://researchbank.rmit.edu.au)

Internet Source

<1%

18

Weiwei Huang, Wenzong Zhou, Weiwei Lv, Bingzhi Dong. "Performance of PAC treatments on MF membrane fouling behavior and mechanism by various algogenic organic matter", DESALINATION AND WATER TREATMENT, 2020

<1%

19

[www.iip.kit.edu](http://www.iip.kit.edu)

Internet Source

<1%

---

20

An Ding, Jinlong Wang, Dachao Lin, Xiaoxiang Cheng, Hui Wang, Langming Bai, Nanqi Ren, Guibai Li, Heng Liang. "Effect of PAC particle layer on the performance of gravity-driven membrane filtration (GDM) system during rainwater treatment", *Environmental Science: Water Research & Technology*, 2018

Publication

<1%

---

21

Liliane Cristina Battirola, Patrícia Fernanda Andrade, Gabriela Vollet Marson, Miriam Dupas Hubinger et al. "Cellulose acetate/cellulose nanofiber membranes for whey and fruit juice microfiltration", *Cellulose*, 2017

Publication

<1%

---

22

Chatkaew Tansakul, Stéphanie Laborie, Corinne Cabassud. "Adsorption combined with ultrafiltration to remove organic matter from seawater", *Water Research*, 2011

Publication

<1%

---

23

Geert Aschermann, Azam Jeihanipour, Junjie Shen, Godfrey Mkongo, Laure Dramas, Jean-Philippe Croué, Andrea Schäfer. "Seasonal variation of organic matter concentration and characteristics in the Maji ya Chai River

<1%

(Tanzania): Impact on treatability by ultrafiltration", Water Research, 2016

Publication

24

Steven Van Geluwe, Leen Braeken, Bart Van der Bruggen. "Ozone oxidation for the alleviation of membrane fouling by natural organic matter: A review", Water Research, 2011

Publication

<1%

25

Song, Yali, Bingzhi Dong, Naiyun Gao, and Xiaoyan Ma. "Powder Activated Carbon Pretreatment of a Microfiltration Membrane for the Treatment of Surface Water", International Journal of Environmental Research and Public Health, 2015.

Publication

<1%

Exclude quotes On

Exclude matches Off

Exclude bibliography On

## Effect of Two Stages Adsorption as Pre-Treatment of Natural Organic Matter Removal in Ultrafiltration Process for Peat Water Treatment

Mahmud<sup>2,a</sup>, Muthia Elma<sup>1,3b\*</sup>, Erdina Lulu Atika Rampun<sup>1,3c</sup>, Aulia Rahma<sup>1,3d</sup>,  
Amalia Enggar Pratiwi<sup>1,3e</sup>, Chairul Abdi<sup>2,f</sup>, Raisa Rossadi<sup>2,g</sup>

<sup>1</sup>Chemical Engineering Department, Faculty of Engineering, Lambung Mangkurat University, Banjarbaru, 70714, Indonesia

<sup>2</sup>Environmental Engineering Department, Faculty of Engineering, Lambung Mangkurat University, Banjarbaru, 70714, Indonesia

<sup>3</sup>Material and Membrane Research Group (M<sup>2</sup>ReG), Lambung Mangkurat University, Banjarbaru, 70714, Indonesia

<sup>a</sup>Mahmud@ulm.ac.id, <sup>b</sup>melma@ulm.ac.id, <sup>c</sup>elarampun@mhs.ulm.ac.id, <sup>d</sup>arahma@mhs.ulm.ac.id  
<sup>e</sup>aepratiwi@mhs.ulm.ac.id, <sup>f</sup>chairulabdi@ulm.ac.id, <sup>g</sup>raissa.rosadi@gmail.com

**Keywords:** Adsorption, natural organic matter, fouling, pretreatment, ultrafiltration

**Abstract.** Natural Organic Matter (NOM) content in peat water is a major problem of membrane fouling in ultrafiltration (UF). For that, two stages adsorption as pre-treatment was employed to minimize the membrane fouling of NOM content. This research was carried out to investigate the effect of two stages adsorption on ultrafiltration performance for NOM removal that remains in peat water. This method was using powdered activated carbon (PAC) dosage of 80, 160, 240, 320, 400, 480, 560, 640, 720, 800, 880 dan 960 mg.L<sup>-1</sup>. Then, Polysulfone (Psf) material was employed for Ultra filtration process. Membrane was applied in a dead-end mode with various operating pressure (1; 1.5; 2; 2.5; 3 bar). As a results, the optimum dose of PAC was 800 mg L<sup>-1</sup> with dosage ratio of 3/4:1/4. Two stages adsorption-UF PSf provided the range from 86.9 to 92.8% of KMnO<sub>4</sub> and 74.1-88.1% of UV<sub>254</sub>. For the experimental condition of 3 bar, the highest flux was achieved up to 39.919 L h<sup>-1</sup>.m<sup>-2</sup>.

### Introduction

Peat water is stored in a peatland and can be found in temperate zone. Amount of natural organic matter (NOM) is present in peat water include humic acid and acidic as well [1]. In general, NOM can be divided into three fraction: hydrophobic (dissolved organic carbon with larger molecular weight), hydrophilic (smaller molecular weight such as: polysaccharides, amino acid, protein and etc) and transphilic (molecular weight between hydrophobic and hydrophilic) [2, 3]. Hence, it is important to treat a peat water.

Ultrafiltration (UF) is an alternative technology to improve water quality [4]. Nevertheless, membrane fouling is still unavoidable problem [5, 6]. Fouling is occurred when foulant deposit on membrane surface or block the pore. It can make a flux drop and lowered membrane performance. In a previous study shows NOM can cause fouling in UF membrane. Although hydrophilic fractions have less impact on water quality, but studies show large size molecules of hydrophilic NOM have greatly main contribute to fouling [7]. Many methods have been reported to minimize the fouling such as photocatalytic [8], oxidation and ozonation [9], coagulation-flocculation [10], and adsorption [11]. Among them, adsorption using activated carbon good to removes hydrophilic NOM [12, 13].

Adsorption of NOM by activated carbon can be pre-treatment [14]. To increase efficiency of NOM adsorption, two stage adsorption using powdered activated carbon (PAC) can be applied. Two stage adsorption process worked by divided adsorbent capability to transfer adsorbate to adsorbent surface itself. It would maximize efficiency removal and required lower dosage rather than one stage adsorption [15]. However, some researches still have pros and cons about PAC effect on membrane fouling Tansakul, Laborie and Cabassud [16] and Campinas and Rosa [17] have investigated PAC as pre-treatment reduce membrane fouling which caused by NOM. In other hand, many researches also

found different results. Combination between PAC and NOM lead to membrane fouling more severe [18-20].

Polysulfone has chosen as polymer because it have highly strength structure on high temperature and chemical resistant [21]. But polysulfone membrane has hydrophobic properties and vulnerable to NOM fouling [22, 23]. So, PEG additive is added to enhance membrane selectivity [24]. Several studies have treat peat water using cellulose acetate [25, 26] and polysulfone membrane [27-29]. In the present work, two stage adsorption with PAC as pre-treatment is carried out to investigated it is the effect on UF PSf performance. Flat sheet of UF membranes were varied at 1-3 bar. Further,  $\text{KMnO}_4$  and  $\text{UV}_{254}$  rejection are determined to represent organic and NOM.

## Materials and Methods

**Materials.** A peat water was collected in KM 17 Banjar regency, South Kalimantan. Polysulfone (Merck), N,N-dimethylacetamide (DMAc) (Merck), Polyethylene Glycol 600 (Merck), KCL 0.5% (Merck), acetone 70% (Merck),  $\text{H}_2\text{SO}_4$ , NaOH (Emsure), oxalic acid (Merck), aquadest, and PAC (Merck), TOC analyzer (Shimidzu), UV-vis, pH meter (Hanna).

**UF membrane synthesis.** Thin film were prepared using phase inversion technique. Firstly, 64% by weight of DMAc was mixed with 18% by weight of PEG until get homogenous solution. Furthermore, polysulfone (18% by weight) was stirred into solution for 24 hours under room temperature.

Coagulation bath were made from DMAc (35% by weight), aquadest, and impregnation KCL (0.5% by weight). KCL was used to make water diffusion rate more slowly. Solution was then cast on clean glass plate, then leave it contact with air for 10 seconds. Lastly, thin film on plate was directly immersed in the coagulation bath which prepared before.

**Two stage adsorption of pre-treatment.** Characterization of peat water were analyzed using DOC, UV at 245 nm ( $\text{UV}_{254}$ ),  $\text{SUVA}_{254}$  ( $\text{UV}_{254}/\text{DOC}$ ), pH and  $\text{KMnO}_4$  as parameters. Variation of PAC dosage was added to 200 ml of peat water (80, 160, 240, 320, 400, 480, 560, 640, 720, 800, 880 and 960 mg.L<sup>-1</sup>) after kept pH 4 constant and stirred under 180 rpm for 120 minute using rotary shaker. This condition refer to previous worked by Aziza [30].  $\text{KMnO}_4$  and  $\text{UV}_{254}$  were tested using titration and UV-Vis, respectively. Optimum dose of PAC was chosen based on the removal.

This optimum dose then used to applied on the next step. In two stage adsorption, PAC was gradually added in two steps by variation of dose ratio (1/4:3/4); (1/3:2/3); (1/2:1/2); (2/3:1/3) of optimum dose. On the first step, 1/4 of optimum dose was mixed into peat water (pH 4) under 180 rpm for 60 minutes. A treated water then filtered by a filter paper before continue to the second step. After that, 3/4 of optimum dose was added again for the second time under same condition (180 rpm, 60 minutes). Repeat it for other dose ratio. Optimum dose ratio was obtained.

**Adsorption UF membrane performance.** For filtration tests, new membrane were used in all cases. The water flux of aquadest was tested to know the pure water permeability as well as PAC+aquadest to investigated the effect of PAC without NOM presence. At the beginning, optimum PAC of dose ratio was added to peat water as pre-treatment. Furthermore, a peat water was flowed through UF membrane (Fig 1). The experiments were carried out with dead end system in varied pressure (1; 1.5; 2; 2.5; and 3 bar) for 1 hour.

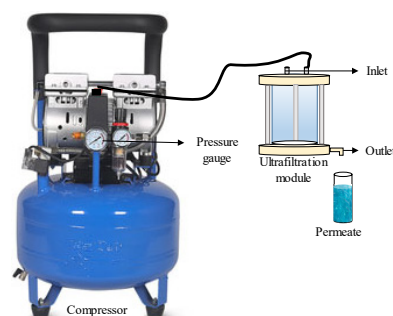


Figure 1. Ultrafiltration set-up

The fluxes was calculated by the following equation (Eq. 1):

$$J = \frac{V}{A \times t} \quad (1)$$

Where J is water flux (L.m<sup>-2</sup>.h<sup>-1</sup>), V is Volume (L), A is membrane surface area (m<sup>2</sup>) and t is time (hour) Rejection of KMnO<sub>4</sub> and UV<sub>254</sub> were determined by the following equation (Eq.2):

$$R = \left( 1 - \frac{c_p}{c_f} \times 100\% \right) \quad (2)$$

R is removal efficiency (%), C<sub>p</sub> is permeate concentration, and C<sub>f</sub> is feed concentration.

## Results and Discussion


**Peat water characteristics.** High organic and low pH of peat water are presented in **Table 1**. So this water is basically not suitable to be consumed [30]. Further, to understand membrane fouling, some parameter such as Dissolved Oxygen Carbon (DOC), UV<sub>254</sub>, and SUVA<sub>254</sub> are important to know. DOC as measure of NOM. UV<sub>254</sub> is good to represent aromatic character on NOM [31]. While, SUVA<sub>254</sub> (DOC divided by UV<sub>254</sub>) is known to provide NOM distribution as hydrophobic or hydrophilic, low or high molecular weight. As summarized in table 3.1, according to Edzwald and Tobiasson [32] SUVA<sub>254</sub> values between 2-4 L mg<sup>-1</sup> m<sup>-1</sup> indicating this peat water has mixture of hydrophilic and hydrophobic.

**Table 1.** Peat water characteristics


Parameter	Unit	Value
pH	-	6.3
DOC	mg/L	36.4
UV <sub>254</sub>	1/Cm	0.98
KMnO <sub>4</sub>	mg/L KMnO <sub>4</sub>	120.08
SUVA <sub>254</sub>	L/mg.m	2.68

**Two stage adsorption.** During the experiment, optimum dose was observed in **Fig 2** before a peat water passed through membrane. It shows the removal efficiency of KMnO<sub>4</sub> and UV<sub>254</sub> tend to be constant after PAC dose increase (>720 mg.L<sup>-1</sup>). It is because the adsorption does not run optimally when too many cation of PAC exist known as restabilization process. In addition, on low of PAC dose (80-720 mg.L<sup>-1</sup>) higher removal efficiency of KMnO<sub>4</sub> was found than UV<sub>254</sub>. This results indicated that PAC has good performance to remove the total of organic but beyond 800-960 mg.L<sup>-1</sup> the removal of hydrophobic fraction increased immediately. PAC treatment resulting in a decrease both of hydrophobic and hydrophilic fraction [12, 33]. Because of this 800 mg.L<sup>-1</sup> was chosen for optimum dose.

Furthermore,  $800 \text{ mg.L}^{-1}$  of PAC dose was added in two steps. As given by **Fig 3**, the ratio of dose 3/4:1/4 result in a higher removal efficiency for  $\text{KMnO}_4$  and  $\text{UV}_{254}$ . It means put a large of PAC dose at the first step then later on, give much smaller dose is more effective on NOM removal. This finding also found on Chairuddin [15] and Pradista [34] work. Two stage adsorption can maximize the removal.

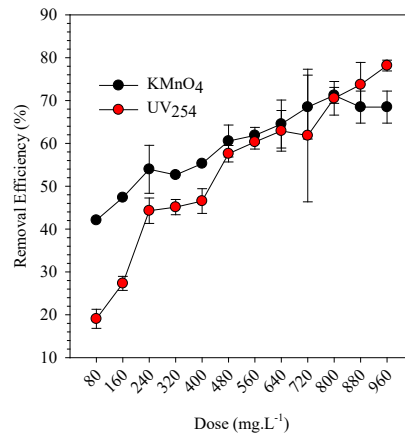

**Figure 2.** Effect of PAC adsorption on organic removal.

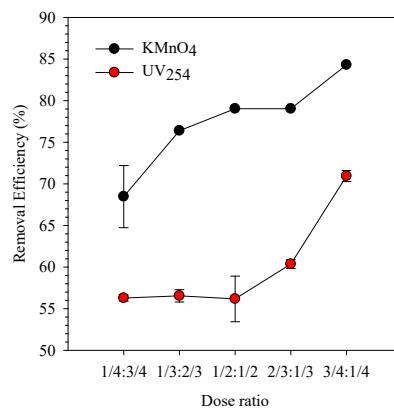

**Figure 3.** Effect of adsorption two stage using  $800 \text{ mg.L}^{-1}$  of dose optimum on organic removal.


**Performance of two stage adsorption-UF PSf .** Two stage adsorption. **Fig 4** shows the more pressure is given, the higher water fluxes were obtained for aquadest and peat water. The highest water flux of aquadest is  $151.24 \text{ L.m}^{-2}.\text{h}^{-1}$  for 3 bar. This prepared UF PSf can be categorized as ultrafiltration membrane because the permeability is produce within  $20\text{-}200 \text{ L.m}^{-2}.\text{h}^{-1}$  [26, 35]. When blank (aquadest+PAC) entered the UF PSf membrane, it delivers  $20.3\text{-}95.65 \text{ L.m}^{-2}.\text{h}^{-1}$  of water fluxes. These water fluxes are 54% lower than aquadest. It suggests PAC may impact on reducing water flux. Similar case also reported by Tomaszewska and Mozia [36]. Contrary to the result found by Lin, Lin and Hao [37]. Nevertheless, some studies investigated PAC did not affected on extent of flux decline using hydrophilic UF membrane [38, 39].

Highest water fluxes of peat water is achieve  $39.91 \text{ L.m}^{-2}.\text{h}^{-1}$  (**Fig 4**). The significant flux drop obviously happened until 73% and 58% compare to aquadest and blank for 3 bar, respectively. Before a peat water has entered the membrane module that undergo adsorption treatment. Two stage adsorption added 3/4:1/4 of optimum dose. Overall the fluxes were decrease on each operating pressure. This phenomena has occurred due to polarization concentration. It is when some particles accumulated on the membrane surface and formed a layer on it. Thus, can reduce the UF membrane performance [6, 40]. Also NOM was attached on the top of membrane surface known as cake layer. Cake layer tightly compact and contribute to worse water flux.


In experiment, NOM could act as glue that make particles easily binding and deposited on membrane surface. Moreover, humic acid can change the shape itself and trapped between PAC-membrane and PAC-PAC [41]. Jucker and Clark [42] studied low pH in peat water exacerbates

membrane fouling because it raising the membrane and molecules interaction as hydrophobicity in solution increase as well. As a results flux drop was observed. However, two stage adsorption-UF PSf obtained 92.8 and 88.11% of removal efficiency for  $\text{KMnO}_4$  and  $\text{UV}_{254}$ , respectively (**Fig 5**). NOM cannot be removed only by using UF alone [38]. By operating UF, lower pressure applied is good on removal. It is because the smaller feed velocity makes particle easy to filter. This results agree with other study reported [43].

To overcome NOM-PAC deposition, pretreatment and backwashing is mostly used [44]. Several parameters such as the structural properties of PAC [45] and membrane type [38, 39] may influence on NOM removal and fouling mitigation. Hence, they need to be considered first.

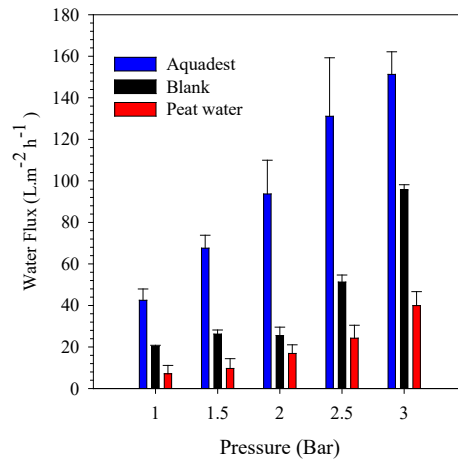

**Figure 4.** Water fluxes using two stage adsorption-UF PSf

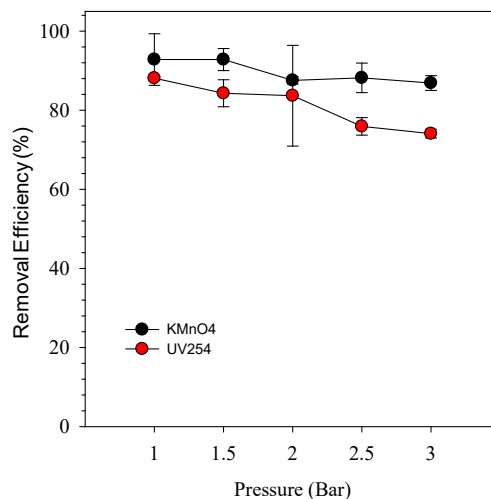

**Figure 5.**  $\text{KMnO}_4$  and  $\text{UV}_{254}$  removal using two stage adsorption-UF PSf

## Conclusion

Based on experimental results, the best dose optimum of PAC was obtained 800 mg.L<sup>-1</sup> and ratio of PAC dose was 3/4:1/4 for treating peat water. Two stage adsorption-UF PSf provided the range 86.9-92.8% of  $\text{KMnO}_4$  and 74.1-88.1% of  $\text{UV}_{254}$ . For the experimental condition of 3 bar, the highest flux was achieve until 39.919 L. m<sup>-2</sup> h<sup>-1</sup>. This study point out that PAC may impact the water fluxes on polysulfone membrane. Although it was successfully remove NOM in the peat water.



## Acknowledgments

The authors acknowledge to the facilities from Environmental Laboratory and Process Technology Laboratory, Engineering Faculty, Lambung Mangkurat University. Muthia thanks to Alumni Grants Scheme Batch 2 in 2018-2019. Applied Research Universities Grant 2019-2020, Thesis Magister Grant 2019 and Post-Doctoral Grant 2017-2018, Directorate of Research and Community Service, the Ministry of Research, Technology and Higher Education Republic of Indonesia.

## References

- [1] I. Sutzkover-Gutman, D. Hasson, R. Semiat, Humic substances fouling in ultrafiltration processes, *Desalination*. 261 (2010) 218-231.
- [2] X. Cui, K.-H. Choo, Natural organic matter removal and fouling control in low-pressure membrane filtration for water treatment, *Environmental Engineering Research*. 19 (2014) 1-8.
- [3] A.W. Zularisam, A.F. Ismail, M.R. Salim, M. Sakinah, H. Ozaki, The effects of natural organic matter (NOM) fractions on fouling characteristics and flux recovery of ultrafiltration membranes, *Desalination*. 212 (2007) 191-208.
- [4] Mahmud, C. Abdi, B. Mu'min, Removal Natural Organic Matter (NOM) in Peat Water From Wetland Area By Coagulation-Ultrafiltration Hybrid Process With Pretreatment Two Stage Coagulation, *Journal of Wetlands Environmental Management*. 1 (2013) 1-8.
- [5] E. Akhondi, F. Wicaksana, A.G. Fane, Evaluation of Fouling Deposition, Fouling Reversibility and Energy Consumption of Submerged Hollow Fiber Membrane Systems with Periodic Backwash *Memb Sci*. 452 (2014) 319-331.
- [6] A.W. Zularisam, A.F. Ismail, R. Salim, Behaviours of Natural Organic Matter in Membrane Filtration for Surface Water Treatment: A Review, 194 (2006) 211-231.
- [7] A.W. Zularisam, I. A.F., S. M.R, M. Sakinah, H. Ozaki, The Effects of Natural Organic Matter (NOM) Fractions on Fouling Characteristics and Flux Recovery of Ultrafiltration Membranes., *Desalination*. (2007) 191-208.
- [8] P. Singh, M.C. Vishnu, K.K. Sharma, R. Singh, S. Madhav, D. Tiwary, P.K. Mishra, Comparative study of dye degradation using TiO<sub>2</sub>-activated carbon nanocomposites as catalysts in photocatalytic, sonocatalytic, and photosonocatalytic reactor, *Desalination and Water Treatment*. 57 (2016) 20552-20564.
- [9] S.S. Hutagalung, I. Muchlis, B. Herlambang, A. Turnip, in: 2014 2nd International Conference on Technology, Informatics, Management, Engineering & Environment, 2014, pp. 288-291.
- [10] A. Rahma, M. Elma, M. Mahmud, C. Irawan, A.E. Pratiwi, E.L.A. Rampun, Removal of natural organic matter for wetland saline water desalination by coagulation-pervaporation, *Journal of Scientific & Applied Chemistry*. 22 (2019) 8.
- [11] K.K. Shimabuku, A.M. Kennedy, R.E. Mulhern, R.S. Summers, Evaluating Activated Carbon Adsorption of Dissolved Organic Matter and Micropollutants Using Fluorescence Spectroscopy, *Environmental Science & Technology*. 51 (2017) 2676-2684.
- [12] V. Uyak, M. Akdagli, M. Cakmaci, I. Koyuncu, Natural Organic Matter Removal and Fouling in a Low Pressure Hybrid Membrane Systems *The Scientific World Journal*. (2014) 1-12.
- [13] H.K. Shon, S. Vigneswaran, I.S. kim, J. Cho, N. H.H, The Effect of Pretreatment to Ultrafiltration of Biologically Treated Sewage Effluent: A detailed Effluent Organic Matter (EfOM) Characterization, *Water Res*. 38 (2004) 1933-1939.
- [14] K. Li, H. Liang, F. Qu, S. Shao, H. Yu, Z. Han, X. Du, G. Li, Control of Natural Organic Matter Fouling of Ultrafiltration Membrane by Adsorption Pretreatment: Comparison of Mesoporous Adsorbent Resin and Activated Carbon, *Memb Sci*. 411-412 (2014) 1-12.
- [15] M.A. Chairuddin, in: Environmental Engineering Study Program, Engineering Faculty, Universitas Lambung Mangkurat, Banjarbaru, 2014.
- [16] C. Tansakul, S. Laborie, C. Cabassud, Adsorption combined with ultrafiltration to remove organic matter from seawater, *Water Research*. 45 (2011) 6362-6370.

- 
- [17] M. Campinas, M.J. Rosa, Assessing PAC Contribution to the NOM Fouling Control in PAC/UF Systems, *Water Res.* 44 (2010) 1636-1644.
- [18] S. Shao, H. Liang, F. Qu, K. Li, H. Chang, H. Yu, G. Li, Combined Influence by Humic Acid (HA) and Powdered Activated Carbon (PAC) Particles on Ultrafiltration Membrane Fouling, *Memb Sci.* 500 (2016) 90-105.
- [19] F. Saravia, F.H. Frimmel, Role of NOM in the Performane of Adsorption-Membrane Hybrid Systems Applied for the Removal of Pharmaceuticals, *Desalination.* 224 (2008) 168-171.
- [20] H. Oh, M. Yu, S. Takizawa, S. Ohgaki, Evaluation of PAC Behavior and Fouling Formation in an Integrated PAC-UF Membrane for Surface Water Treatment, *Desalination.* 192 (2006) 54-62.
- [21] P.T.P. Aryanti, Khoiruddin, W. I.G, Influence of Additives on Polysulfone-Based Ultrafiltration Membrane Performance during Peat Water Filtration, *Journal of Water Sustainability.* 3 (2013) 85-96.
- [22] K. Kimura, Y. Hane, Y. Watanabe, G. Amy, N. Ohkuma, Irreversible membrane fouling during ultrafiltration of surface water, *Water Research.* 38 (2004) 3431-3441.
- [23] M.M. Clark, P. Lucas, Diffusion and partitioning of humic acid in a porous ultrafiltration membrane, *Journal of Membrane Science.* 143 (1998) 13-25.
- [24] X. Chen, J. Luo, B. Qi, W. Cao, Y. Wan, NOM fouling behavior during ultrafiltration: Effect of membrane hydrophilicity, *Journal of Water Process Engineering.* 7 (2015) 1-10.
- [25] R. Riduan, Studi Pengaruh Penambahan Karbon Aktif Pada Optimasi Penurunan Warna Dan Kandungan Organik Pada Air Gambut Menggunakan Membran Ultrafiltasi, *Info Teknik.* 6 (2005) 54-60.
- [26] N. Herwati, Mahmud, C. Abdi, Pengaruh pH Air Gambut terhadap Fouling Membran Ultrafiltrasi, *Jukung Jurnal teknik Lingkungan.* 1 (2015) 59-73.
- [27] D. Ariono, P.T.P. Aryanti, S. Subagjo, I.G. Wenten, The Effect of Polymer Concentration on Flux Stability of Polysulfone Membrane, *AIP Conference Proceedings.* 1788 (2017).
- [28] P.T.P. Aryanti, S.R. Joscariita, A.K. Wardani, S. Subagjo, D. Ariono, I.G. Wenten, The Influence of PEG400 and Acetone on Polysulfone Membrane Morphology and Fouling Behaviour, *Journal of Engineering and Technological Sciences.* 48 (2016).
- [29] D. Ariono, P.T.P. Aryanti, S. Subagjo, I.G. Wenten, The effect of polymer concentration on flux stability of polysulfone membrane, *AIP Conference Proceedings.* 1788 (2017) 030048.
- [30] EPA, in, 2019.
- [31] A. Matilainen, E.T. Gjessing, T. Lahtinen, L. Hed, A. Bhatnagar, M. Sillanpää, An overview of the methods used in the characterisation of natural organic matter (NOM) in relation to drinking water treatment, *Chemosphere.* 83 (2011) 1431-1442.
- [32] J.K. Edzwald, J.E. Tobiason, Enhanced coagulation: US requirements and a broader view, *Wat Sci Tech.* 40 (1999) 63-70.
- [33] D. Wang, Q.-Y. Hu, M. Li, C. Wang, M. Ji, Evaluating the Removal of Organic Fraction of Commingled Chemical Industrial Wastewater by Activated Sludge Process Augmented with Powdered Activated Carbon, *Arabian Journal of Chemistry.* 15 (2015).
- [34] D.S. Pradista, in: *Fakultas Teknik, Universitas Lambung Mangkurat, Banjarbaru, 2016.*
- [35] I.G. Wenten, *Teknologi Membran Industrial, ITB, Bandung, 1999.*
- [36] M. Tomaszewska, S. Mozia, Removal of organic matter from water by PAC/UF system, *Water Res.* 36 (2002) 4137-4143.
- [37] C.-F. Lin, T.-Y. Lin, O.J. Hao, Effects of humic substance characteristics on UF performance, *Water Research.* 34 (2000) 1097-1106.
- [38] S. Mozia, M. Tomaszewska, A.W. Morawski, Studies on the effect of humic acids and phenol on adsorption-ultrafiltration process performance, *Water Res.* 39 (2005) 501-509.
- [39] C.-W. Li, Y.-S. Chen, Fouling of UF membrane by humic substance: Effects of molecular weight and powder-activated carbon (PAC) pre-treatment, *Desalination.* 170 (2004) 59-67.

- 
- [40] S. Notodarmojo, T.Zulkarnain, D. Mayasanthy, M. Irsyad, Efek Pretreatment Terhadap Pembentukan Lapisan Cake dan Struktur Membrane pada Membran Ultrafiltrasi Aliran Cross-flow dalam Pengolahan Limbah Cair Emulsi Minyak, *Proc ITB Sains & Tek.* 36 (2004) 127-144.
- [41] S. Shao, L. Cai, K. Li, J. Li, X. Du, G. Li, H. Liang, Deposition of powdered activated carbon (PAC) on ultrafiltration (UF) membrane surface: influencing factors and mechanisms, *Journal of Membrane Science.* 530 (2017) 104-111.
- [42] C. Jucker, M.M. Clark, Adsorption of aquatic humic substances on hydrophobic ultrafiltration membranes, *Journal of Membrane Science.* 97 (1994) 37-52.
- [43] H.A. Maddah, A.S. Alzhrani, M. Bassyouni, M.H. Abdel-Aziz, M. Zoromba, A.M. Almalki, Evaluation of various membrane filtration modules for the treatment of seawater, *Applied Water Science.* 8 (2018) 150.
- [44] A.W. Zularisam, A.F. Ismail, R. Salim, Behaviours of natural organic matter in membrane filtration for surface water treatment — a review, *Desalination.* 194 (2006) 211-231.
- [45] M. Schulz, S. Bünting, M. Ernst, Impact of Powdered Activated Carbon Structural Properties on Removal of Organic Foulants in Combined Adsorption-Ultrafiltration, *Water.* 9 (2017) 580.